

**The description and use of Nairne's patent electrical machine / with the addition of some philosophical experiments, and medical observations.**

**Contributors**

Nairne, Edward, 1726-1806.

**Publication/Creation**

London : Pr. by Edward Nairne and sold by Nairne and Blunt, 1793.

**Persistent URL**

<https://wellcomecollection.org/works/aeqv4m2y>

**License and attribution**

This work has been identified as being free of known restrictions under copyright law, including all related and neighbouring rights and is being made available under the Creative Commons, Public Domain Mark.

You can copy, modify, distribute and perform the work, even for commercial purposes, without asking permission.




Wellcome Collection  
183 Euston Road  
London NW1 2BE UK  
T +44 (0)20 7611 8722  
E [library@wellcomecollection.org](mailto:library@wellcomecollection.org)  
<https://wellcomecollection.org>








*Philip Drake.*

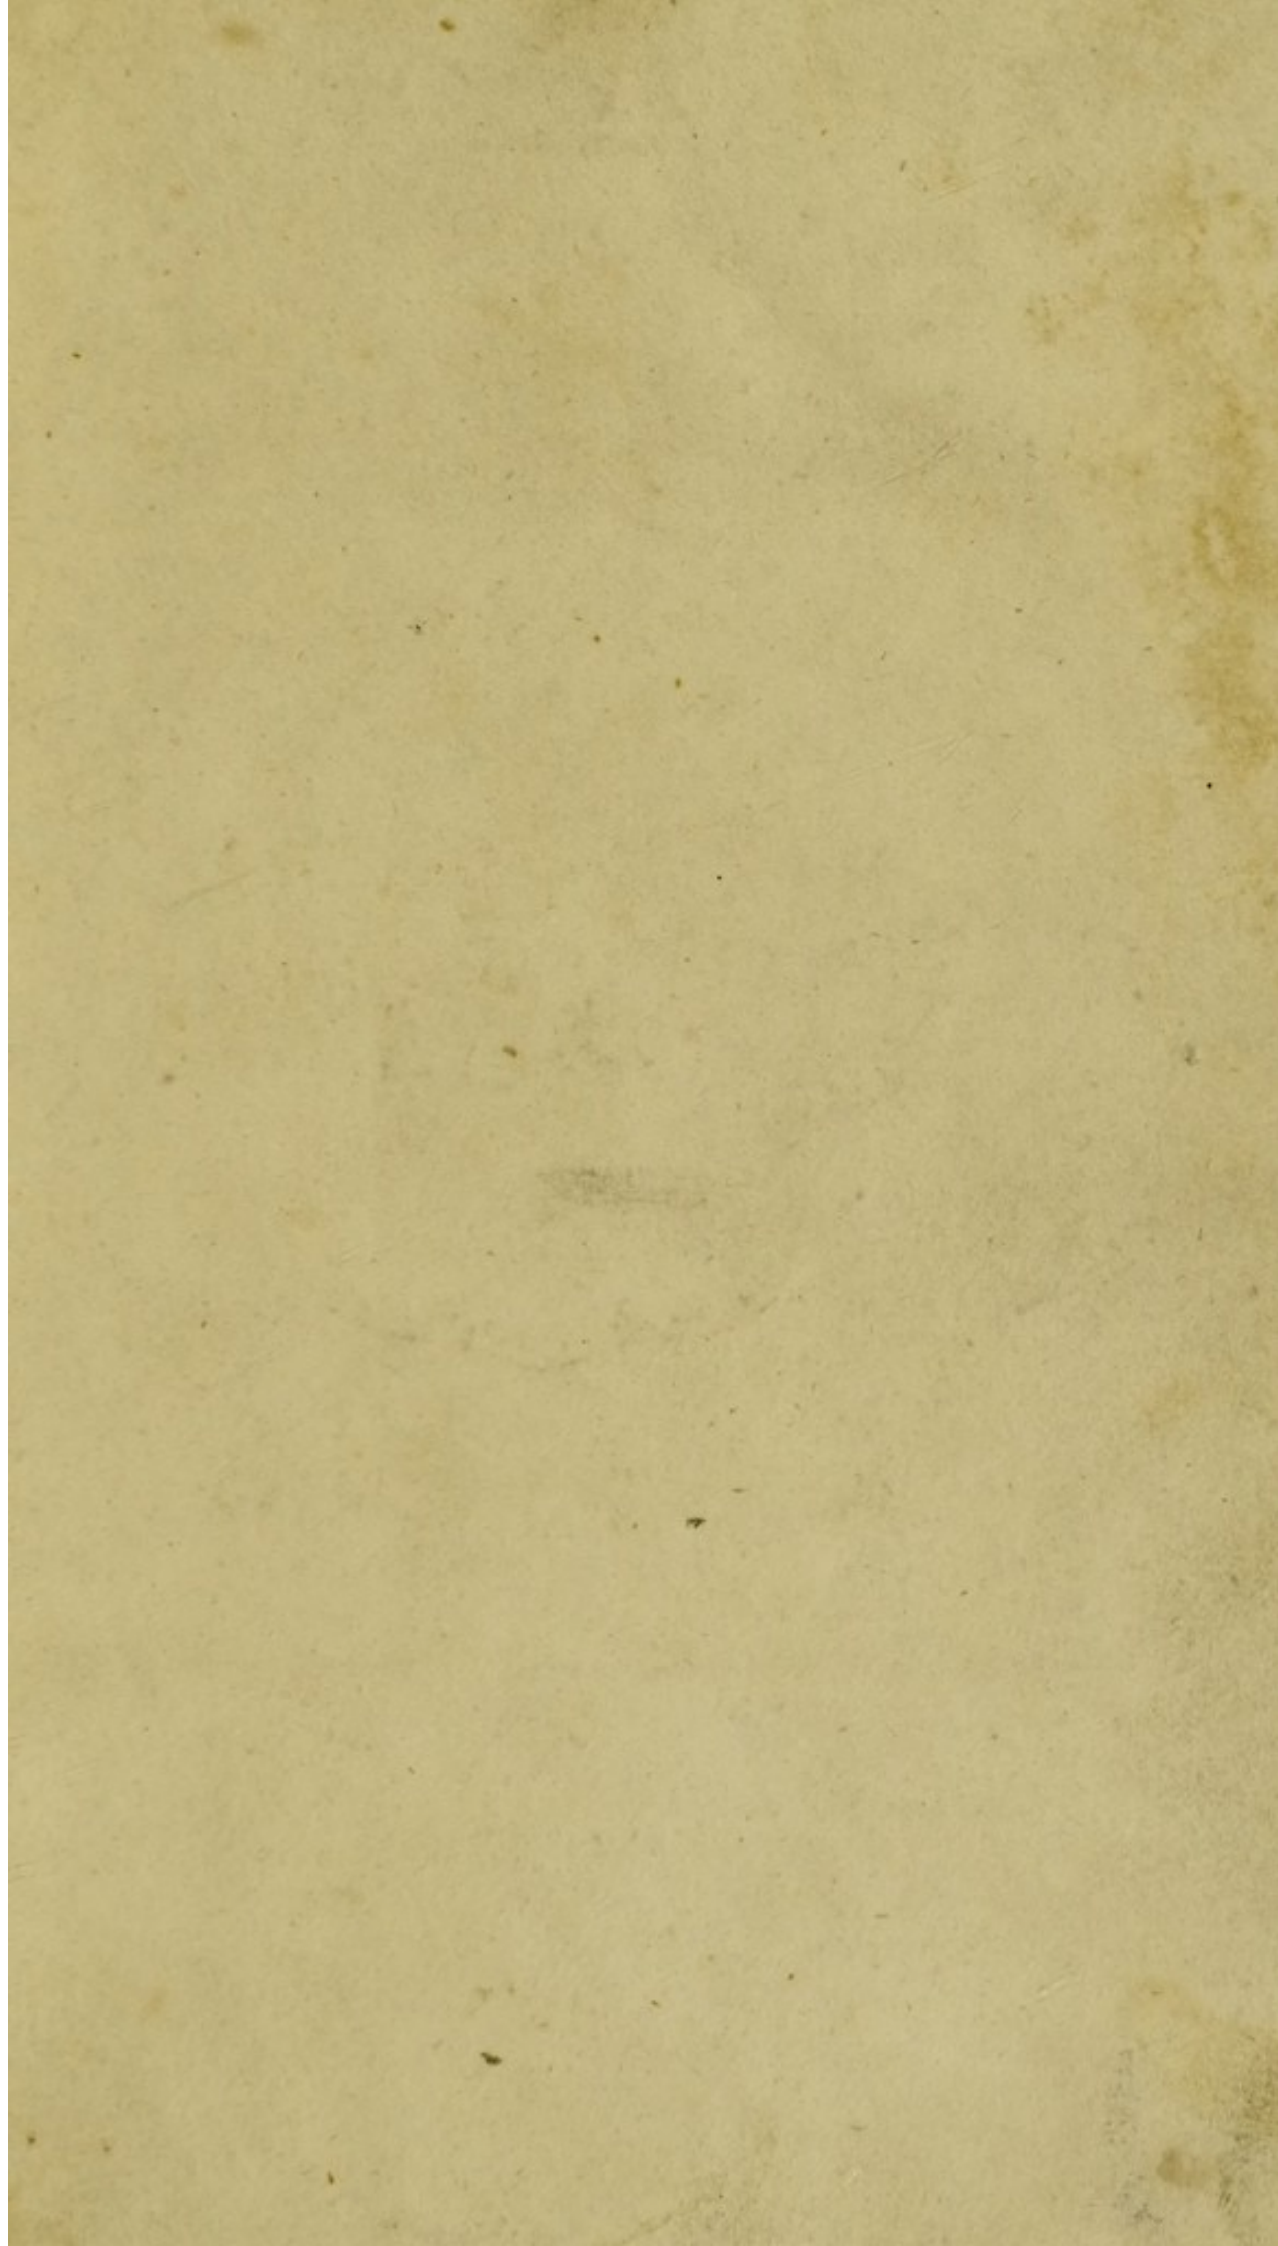



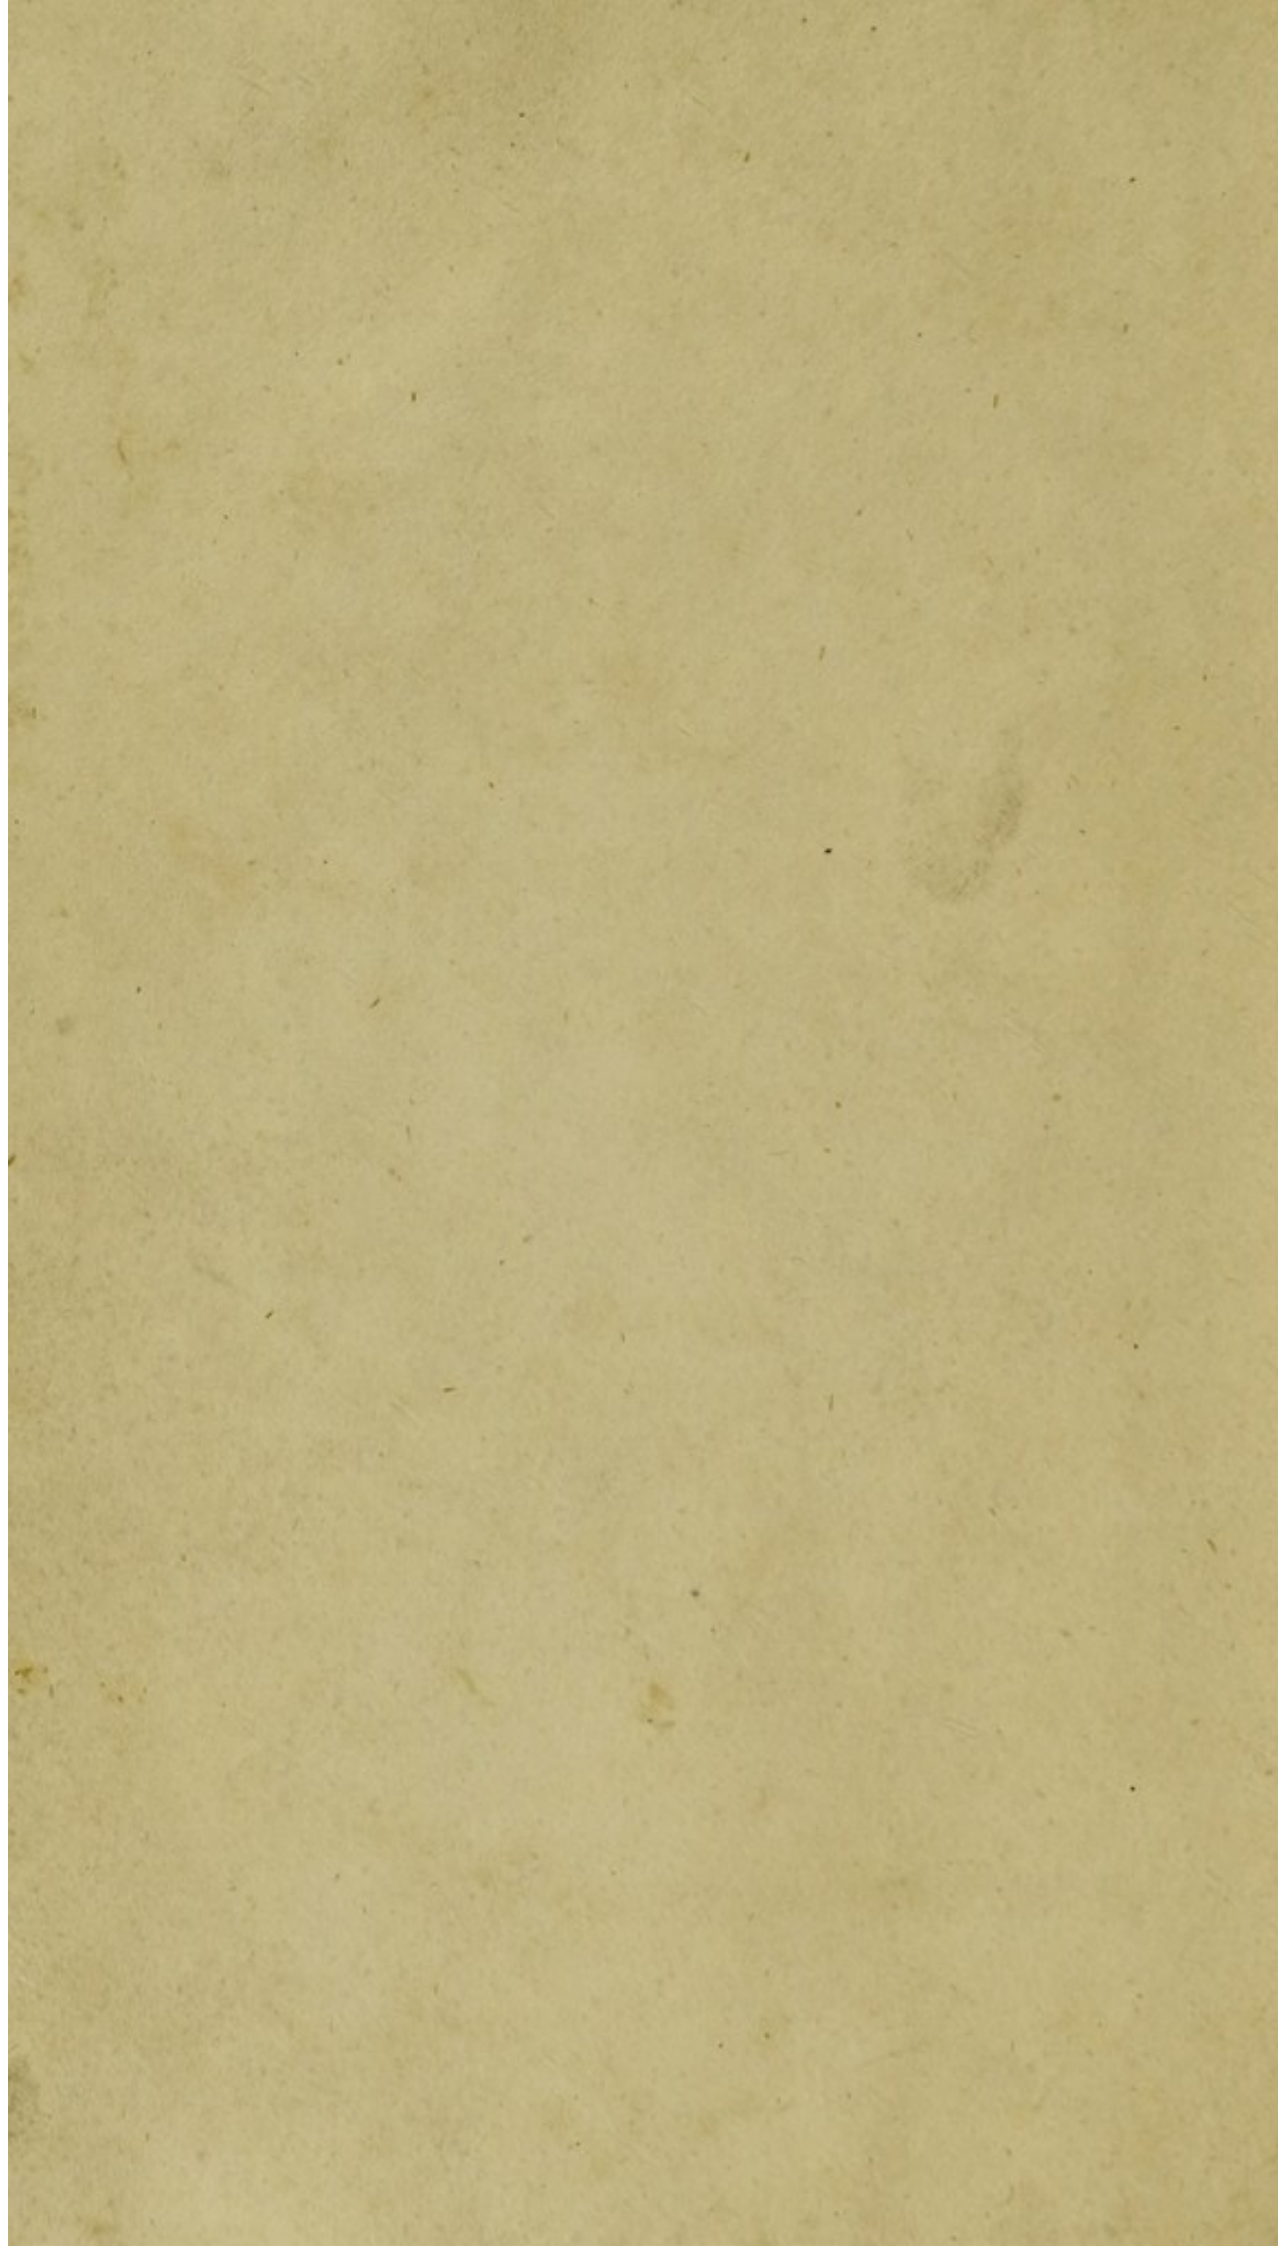

THE  
DESCRIPTION and USE  
OF  
*Edward*  
*N A I R N E* ' s  
Patent Electrical Machine ;  
WITH THE ADDITION OF SOME  
PHILOSOPHICAL EXPERIMENTS,  
AND  
MEDICAL OBSERVATIONS.

---

---

THE FOURTH EDITION.

---

---

L O N D O N :

PRINTED FOR EDWARD NAIRNE :

AND SOLD BY NAIRNE AND ELUNT, NO. 20, CORNHILL.

M.DCC.XCIII.





THE  
DESCRIPTION AND USE  
OF  
N A I R N E ' s

Patent Electrical Machine.

**T**HOUGH this machine and its apparatus are constructed with a particular view to the purposes of medicine, yet it will be found equally applicable to philosophical uses. All its parts are insulated in the best possible manner; and, from the expence and study which the inventor has bestowed in rendering it perfect, it is much superior in its action to any machine of the size yet made. In the following description the same letter of the alphabet is used to denote the same thing in all the engravings, and every attention has been paid to make the whole intelligible and clear.



## C H A P. I.

A DESCRIPTION OF THE PARTS OF WHICH  
THE MACHINE IS COMPOSED.

**P**LATE I. contains a perspective view of the machine, all its parts being properly put together. The letters of reference in the present chapter respect this plate, except where it is otherwise mentioned.

A A. The glass cylinder.

B B. Two glass pillars which support the glass cylinder A A.

C. The handle by which the glass cylinder A A is turned.

R. and G. Two metallic conductors.

D D. Two glass pillars, one supporting the conductor R, and the other G.

E. The board into which the pillars B B, which support the cylinder A A, are fixed.

F F.

F F. Two pieces of wood. In these pieces are fixed the pillars D D, which support the conductors R and G.

H H. Two knobs of brass foldered on the outside of each of the conductors R and G.

I. The cushion which is attached, by a contrivance hereafter mentioned, to the side of the conductor R, between that and the cylinder A A. The end of it is seen at Plate III. Fig. 1, 2, and 6.

K. The silk, one end of which is glued to the under part of the cushion I. It is turned over upon the cylinder A A, so that part of the silk is between the cylinder A A and the cushion I.

L. A screw of wood which passes through a slit in the upper part of the board E into the piece F, which, by screwing, draws the piece F up against the bottom of the board E. The use of it is to keep the glass pillar which is fixed in F, which supports the conductor R, to which the cushion is at-



tached, in its place, when the cushion is pressed gently against the cylinder A A.

M. The points which are soldered to that side of the conductor G which is next the cylinder A A. They are only seen at Plate III. Fig. 2.

N N. The ends of the conductors R and G, which may be taken off from the other part, as represented Plate V. Fig. 1; 2.

S. An electrical coated glass jar fastened in the inside of the conductor G. In the inside of this jar is fitted a piece of cork, and in the cork a small glass tube coated, and likewise a brass wire with a ball, which are seen Plate V. Fig. 1, 2.

The internal part of the conductor R is fitted up exactly in the same manner.

P P. are knobs of brass screwed fast to the board E. A piece of tin-foil is pasted on the board, so as to make a metallic communication between them. This piece of tin-foil is represented by the two parallel  
lines

lines in Plate I. Plate IV. Fig. 1. and Plate V. Fig. 1.

O. The electrical stool, with its four glass legs. On the top of the board of the stool is fastened a piece of lead communicating with two holes, into either of which holes the end of one of the tubes with the pliable joints f f f Plate II. are to be put, the other end being connected with either of the conductors. See Plate IV. Fig. 1 and 3.

Q. A large sheet of paper to place the glass legs of the stool on. It is used to prevent the dust or lint flying up from the floor or carpet to the stool when electrified. See Plate IV. Fig. 1, 3.

## CHAP.



## C H A P. II.

## A DESCRIPTION OF THE APPARATUS.

**P**LATE II. contains drawings of the apparatus not described in the preceding chapter. In this plate the parts are represented as detached from the machine; but the plates referred to, are those in which their application is shewn.

a. An iron clamp, or vice, Plate IV. Fig. 1.

b. An iron chain, with a brass ring at each end, Plate I. Plate III. Fig. 1. Plate IV. Fig. 1. and Plate V. Fig. 1, 2.

c. A piece of card-paper, with a round piece of leather glued to it, on which the amalgam is first spread, before it is applied to the glass cylinder A A.

d. A compound joint, which has not only a vertical, but also an horizontal motion, when applied to the conductor R or G,  
Plate

Plate III. Fig. 1, 2, 5, 6. Plate IV. Fig. 1, 2.

e e e. Three metallic tubes, connected by means of two wooden joints : they are here represented as screwed to d, Plate III. Fig. 1, 2, 3, 4.

f f f. Three metallic tubes, connected by means of four pieces of wood, and two pliable or flexible joints, Plate I. Plate III. Fig. 5 and 6. Plate IV. Fig. 1, 2, 3.

g. A piece of wood fixed to one of the tubes f, and which has a hole at right angles to the tube into which one end of the glass handle k is put, Plate I. Plate III. Fig. 5 and 6. and Plate IV. Fig. 1, 2, 3.

h. A metallic ball, screwed to the end of one of the tubes f or e, Plate I. Plate III. Fig. 1, 2, 5, 6. Plate IV. Fig. 2 and 3.

i. Brass or wooden conical points, Plate III. Fig. 3, 4.

k. Glass handle, Plate III. Fig. 5 and 6. Plate IV. Fig. 3. Plate V. Fig. 2.



l. Clamp or vice of wood, Plate IV. Fig. 2.

m. Metallic cord, covered with worsted, Plate IV. Fig. 2 and 3.

n. Electrometer, Plate V. Fig. 1 and 2.

o. Metal chain, with a ring at one end, and at the other a piece of brass wire, Plate V. Fig. 1, 2.

p. Piece of wood, with the brass wire of o fixed to it, and which has a hole at right angles to the wire, in which one end of the glass handle k is put, Plate V. Fig. 1 and 2.

q. Screw-driver for tightening the side joint of d.

r. Forked screw-driver for tightening the vertical joint of d, and also the two joints of e.

s. Pointil, to be put into the small hole at the end of one of the tubes e or f, to unscrew them, in case they should get too tight to be unscrewed by hand from the joint d.

t. Luminous insulated discharging rod, invented by Edward Nairne.

u. Communicator, which is to be applied over the edge of the jar S, Plate V. Fig 1. when the glass tube within the said jar is to be used for the gentler shocks or vibrations, as directed Chap. IV. § 29.

With each electrical machine, which has the complete medical apparatus, there are sent two sets of that part of the apparatus marked b, c, d, e e e, f f f, i, k, o p ; and also six balls of three different sizes, viz. two of each size ; and likewise two coated electrical jars, and two coated glass tubes, viz. one of each fixed in each conductor. It must be observed, that the tubes e e e unscrew only from the joint d ; no attempts should be made to unscrew any other part, except the balls or points that may occasionally be screwed on at the other end : the same likewise must be observed of the tubes f f f, excepting that the



tube to which g is fixed, may be unscrewed out of the piece of wood which connects it to the flexible joint. g. f. h. Plate II.

## C H A P.

## C H A P. III.

DIRECTIONS FOR PUTTING THE PARTS  
OF THE ELECTRICAL MACHINE PRO-  
PERLY TOGETHER, AND PREPARING  
IT FOR USE.

1. **H**AVING lifted the machine out of the box by taking hold of the wood work of the glass cylinder A A, set it upon a table as represented Plate I. on which it is to be used, and fasten it there by means of the iron clamp a, Plate II.

2. The handle C, which is reversed for the conveniency of packing the machine in a shorter box, is now to be reversed to what it was when taken out of the box.

3. Now take off the cushion I, with its silk K, from the conductor R, which



is easily done by taking hold of the cushion, and drawing it towards that end of the machine which is farthest from the handle C: observe, before you take the cushion off, how it is attached to the side of the conductor R, viz. by means of two brass screws, which are screwed into the wood of the cushion, the heads of which are slipped in between the flits in the two pieces of brass (that are blacked,) and soldered to the conductor R.

4. The cushion being off, take a clean, warm, dry, soft linen cloth, not very old, as they are apt to have the lint come off,\* and wipe all the parts till they are very clean and free from damp or moisture;† particularly the glass cylinder A A, and the

\* Or any piece of silk or flannel, if it is made very dry and warm.

† *Note.* A small quantity of *dry* chalk or whiting, rubbed on any of the cloths with which the machine and apparatus is wiped, will be found to be very useful in taking off the damp or moisture which may adhere to any part of it.

the pillars B B and D D. This should be done every time the machine is used, and likewise while it is using, if worked for any length of time. If the air be very moist or damp, or the machine has been kept in a damp place, (which should be avoided, if possible) it will be proper to dry the whole machine gently, *except the cushion*, by placing it at a distance of about four feet from the fire; but this will be very seldom necessary, if the machine is used in a room with a fire. The cushion I, with its silk K, must also be wiped clean from dust; and any amalgam which may loosely adhere to them, must also be wiped off; and if the weather is damp, or the machine has been kept in a damp place, the silk K should then be gently dried before the fire, *but not the cushion I*, only the silk K of the cushion. The best way is to hold something before the cushion, to keep the heat of the fire from it, when the silk K is drying. The wood of the cushion  
being



being *damp*, is no inconveniency, but rather an advantage.\*

5. The cushion is now to be replaced, by flipping the two heads of the screws under the two flits, in the pieces soldered to the conductor R, § 3. always observing that the filk K lies on the glass cylinder A A, so that the edge of the filk K, farthest from the leather cushion, to which it is either glued or pasted, may be near the points M, viz. within about half an inch; but observe that the edge of the filk must not touch the points. If it does, it must be cut shorter. See Plate III. Fig. 2.

Now gently press the cushion with the filk against the glass cylinder A A, by moving the slider F further under the board E, and fixing it there by the screw L. See L. Chap. I.

6. Next observe that one of the brass rings of the iron chain b, hangs on the brass knob

\* *Note.* Sometimes the table and the floor is so dry as to prevent the cushion from being supplied with the electrical fluid from the earth. In that



knob H of the conductor R, the other end resting on the table.

7. Turn the silk from off the glass cylinder A A, back on the conductor R.

8. The machine being prepared according to the foregoing directions, take one of the pieces of card c, Chap. II. and Plate II. with the leather glued on it, on which some amalgam is spread ; \* rub the amalgamed part of the leather on the glass cylinder A A, about ten or twelve times backwards and forwards, in the direction of its length, on that part which is near the

case, the chain b, hanging from either conductor, must be connected with a quantity of metal, such as the fire-grate in the room, or leaden pipes communicating with water or moist earth.

\* The amalgam is made by melting five parts of mercury with one of zink; and when cold, is mixed with any kind of fat. I commonly use hogs lard, about a fortieth part of the whole weight.

If sometimes the amalgamed leather on the card c, Chap. II. and Plate II. be rubbed over with a very small quantity of hogs lard, or any grease, as the end of a tallow candle, &c. before fresh amalgam is spread over the said leather, it will be found to be of service towards exciting the cylinder when rubbed again with the fresh amalgam on it.



the cushion ; at the same time gently turning the handle, so that the upper part of the cylinder may pass from the cushion towards G, the opposite conductor. This is to be understood in all cases where the cylinder is directed to be turned.

9. The cylinder A A. being now ready to be excited, replace the silk as directed § 2 and 5, and turn the cylinder A A. The ball h, being screwed at the end of one of the tubes f, apply it about an inch or two from the conductor G, and strong sparks will be received on the ball. See Plate I. If every thing be dry and in order, the machine will be found greatly to exceed any electrical machine of the same size yet made.

10. The method of applying the amalgam, § 8, must be repeatedly used whenever the electricity becomes weak ; and it will be proper, when the machine is used for a considerable time at once, to take the cushion sometimes from the conductor R, and wipe the  
the

the cylinder A A, and wipe off any amalgam which may loofely adhere to the filk, and alfo the mercury of the amalgam, which often paffes through the filk, in fine particles, on to the leather of the cushion.\*

11. By often rubbing the amalgamed part of the leather c againft the cylinder AA, the furface of the amalgam will become fmooth and dry ; fo that, after being ufed fome time, the glafs cylinder will not be excited fo ftrongly, when rubbed with it. In this cafe a fmall quantity of frefh amalgam, not more than the fize of half a fmall pea, muft be taken out of the box marked *Amalgam*, and fpread on the

D leather,

\* It will be found to be an advantage, fometimes to ufe one cushion, and fometimes the other, there being always two fent : alfo, turning the glascylinder fometimes backwards, viz. the contrary way, about eight or ten times (having firft turned the filk back), is likewise found to be of advantage towards exciting the glafs cylinder, when turned again, as ufual, with the filk on the glafs cylinder.



leather, and applied as before; by which means the cylinder may always be excited very strongly, and the quantity of amalgam in the box will last a long time.

12. The strength of the spark is regulated by means of the different sized balls: that is to say, if very strong sparks are required, the largest ball must be used; if rather weaker, the next smaller ones; and, if very weak, the smallest balls, or the metallic points: or if weak sparks are required from either of the balls, the *silk* of the cushion must be turned back over the conductor R, and kept there, by laying something on the upper part of the cushion.

13. If the machine is required to produce its greatest effect, it should be used in a dry warm room; for it is a fact well known to electricians, that if the air be moist, the moisture will conduct the electricity away almost as soon as it is excited.

14. If at any time the filk K of the cushion I should be damaged, it may be easily replaced by gluing on a new one of the same dimensions in its place. Observe particularly, that the edge of the new filk reaches within about half an inch of the points M, when laid on the cylinder. See Plate III. fig. 2. The filk is only common black mode, about four or five shillings a yard.

15. If an accident should happen to any part of the electrical machine, it can be replaced without sending the other parts.

16. The cylinder A A sometimes gets a number of little black spots, by the grease and amalgam sticking to it: this may be wiped off with a dry linen cloth or a piece of filk, first rubbing the cylinder gently, in the direction of its length, with a piece of sand, emery, or glass paper, or a piece of fish-skin, or wiping the cylinder with a cloth dipped in soap suds.



17. If the axis and pivot upon which the glass cylinder turns, should at any time want grease, the cylinder may be taken out of its frame by unscrewing the two screws at the top of the glass pillar near the handle, and may be replaced after applying the quantity of grease required.

## C H A P. IV.

OF THE USE AND APPLICATION OF THE  
PATENT ELECTRICAL MACHINE TO  
MEDICAL AND PHILOSOPHICAL PUR-  
POSES.

**H**AVING described the electrical machine and apparatus, and also given directions for preparing the machine for use, it will now be proper to give directions for their application.

1. It is universally allowed that the electrical fluid can be rarefied or condensed.

2. This electrical machine, therefore, may not be improperly called a machine for rarefying or condensing the electrical fluid.

3. The glass cylinder A A, by rubbing against the silk K, that is between the cushion I and cylinder A A, is continually depriving,



depriving, not only the cushion of its electricity, but also the conductor R, connected with it. This is as constantly supplied from the earth, or common stock, by the chain b, while it hangs from the conductor R to the table. The electricity, thus drawn from the earth up the chain b, to the conductor R, and cushion I, is superinduced or condensed on the conductor G. If now the knuckle, or any other blunt conducting substance, be applied within the striking distance of the conductor G, then G will give or part with the electricity superinduced or condensed on it, to the knuckle, or any other blunt conducting substance opposed to it.

4. But if the chain b is hung on the knob H of the other conductor, viz. G; then the cylinder, by rubbing against the silk, exhausting, as before, the cushion I and conductor R, carries the electricity to the conductor G: but in this case it is not superinduced or condensed on it as before; for

for the chain b, hanging from G to the table, which communicates with the earth, conveys it away to the earth, or common stock, as fast as G receives it; so that G remains in its natural state, and R is exhausted more or less of its natural quantity of electricity.

Now if the knuckle, or any other blunt conducting substance, be brought within the striking distance, an electrical spark will be received from the blunt conducting substance by R, to supply what it has been deprived of; and these sparks will be continually received from the knuckle, or any blunt conducting body, brought within the striking distance, while the cylinder A A is excited so as to exhaust R; for which purpose, it is always requisite that the chain b, hanging on G, should make a communication between it and the earth.

5. But if the chain b is not hung either to R or G, neither of them will have  
any



any communication with the earth, 'because the cylinder A A, and the conductors R and G, are insulated by means of the glass pillars B B and D D. Then, on turning the cylinder, the electricity will be exhausted, as before, from I and R; and only that quantity of electricity which is contained in them, or part of that quantity, will be superinduced on G; and this quantity, as it cannot get off from G to the earth, will be continually passing back again, under the cylinder A A, to that part which was exhausted of it.

6. Whence it is obvious, that this machine, to use the common mode of expression, is either a negative or positive one, and may instantly be changed from the one to the other.

7. It may also be made immediately to act on a person in the same manner as if he was electrified by two distinct electrical machines at one time, viz. with a positive and a negative one.

8. The

8. The conductor R, connected with the cushion, is that which is usually called the negative one.

9. The conductor G is commonly called the positive one.

10. If the cylinder be excited while the chain b hangs on the knob H of the conductor R, and a person applies his knuckle, or any blunt conducting body, to G, within the striking distance, he will then receive *positive sparks* on the knuckle, or conducting substance, from the conductor G.

11. Or if a person be placed on the insulated stool O, while it is connected with the conductor G, by means of the compound joint d, and the flexible joints fffg. Plate IV. fig. 1. any other person standing on the ground, presenting his knuckle, or any blunt conducting body, to the person on the stool, will receive positive sparks from the insulated person.

12. But if the chain b be hung on the knob H of the conductor G, and a per-

E

son



son applies his knuckle or any blunt conducting body near R, so that sparks may pass between it and the conductor, he is then *said* to receive *negative* sparks on his knuckle from the conductor R.

13. Or if the compound joint d, and the flexible joints fffg, be applied to the conductor R, and connected with the insulated stool in the same manner as it was before with the conductor G, and the chain b hung on the brass knob H of the conductor G; if a person stands now on the insulated stool, and sparks pass between him and any other person standing on the ground, it is then *said* that the person on the ground receives *negative* sparks from the person on the stool.\*

14. In

\* *Quære.* Is it not that real or positive sparks pass from the knuckle, or blunt conducting body, to the conductor R (or the *person* standing on the insulated stool) to supply that conductor (or the person standing on the stool) of the electrical fluid they have been exhausted or deprived of, by being connected with the conductor R, to which the cushion is attached?



14. In the following pages, speaking of the conductors R and G, I have made use of the expressions Receiving and Giving, or words to that effect, instead of Negative and Positive. The propriety of this mode of speaking is sufficiently evident, from what has already been said in the present Chapter.

15. Plate III. Fig. 1. represents the machine with the apparatus, as in use for receiving electrical sparks from the arm without placing the person on the electrical stool.

16. But if the electrical sparks, instead of being received *from*, are to be given *to* the arm, then d, with the apparatus, is to be put to the conductor G, instead of R; by placing the stem of d in the hole at the top of G; and at the same time hanging the chain on the brass knob H, at the side of R, instead of the side of G, as when sparks were to be received from the arm. It is obvious, that sparks



may either be received from, or given to any other part by this apparatus, as it may be placed, by means of the joints, in any position, for that purpose.

17. Plate III. Fig. 2. represents the manner of drawing sparks *from* and giving sparks *to* the hand, exactly as if it was electrified at the same time by two distinct electrical machines, namely, what is called a positive and negative machine.

Among the many proofs of the circuit of the electric matter, an elegant one is afforded by hanging the chain on the knob H of either of the conductors in this experiment ; for the passage of the electricity is immediately disturbed by the communication with the earth, and sparks pass only between the hand and the conductor which remains insulated.

18. By this apparatus sparks may at the same time be drawn *from* any part, and given *to* any other part, without using the electrical stool : as, for example, suppose them



them to be taken from the knee, and given to the opposite shoulder; in this case the ball that is connected with the conductor R must be directed to the knee, and the other to the shoulder, which is easily done by means of the joints.

The chain b must not be hung upon either conductor, when the electrical machine is intended to answer the purposes of two machines.

19. Plate III. Fig. 3, 4. is the same apparatus as in Fig. 1. but only represented in part, and with the conical points, instead of the ball: these are to be applied in the same manner as at Fig. 1. If the wooden conical point be used, then only the electrical aura or wind will be felt without any spark, and may be applied without the least inconvenience even close to the eye, as represented Fig. 3.

20. If the conical brass point be used instead of the wooden point, then the electrical aura or wind will be felt, if the face,  
or



or any other part, is at the distance of about five or six inches from it. If any part be brought near the conical brass point, sharp pungent sparks will be felt.

21. The conical points may also be applied and used instead of the balls in every experiment where the balls are mentioned, the screw of the conical point being the same.

22. Plate III. Fig. 5. represents the hand of a person directing the ball by means of the pliable joints and tubes fff, and glass handle K, to his leg, in order to give electrical sparks to it; but if the tubes and joints had been connected with the other conductor, viz. R, then electrical sparks would have been received from the leg, instead of being given to it.

23. Plate III. Fig. 6. represents a person directing the two balls by means of the pliable joints and tubes fff, and the two glass handles k k, in order to draw electrical sparks from one shoulder, and at the same



same time give them to the other, and that without standing on the stool: these balls are readily directed to any other part, by means of the aforefaid glass handles and pliable joints.

The two sets of tubes with flexible joints may be screwed together to make a greater length, if it is required to electrify a person lying in a bed.

Plate IV. Fig. 1. shews the manner of connecting the electrical stool with either conductor, by means of the tubes fff, with the flexible or pliable joints. Care must be taken that no part of them are near the table, by at least five or six inches.

25. The arm represented in the Plate at Fig. 2. is supposed to be the arm of a person standing on the electrical stool, and turning the cylinder at the same time, whereby he will receive more than his natural quantity of electricity, the stool being connected with the conductor G; and when the person applies his arm to the ball  
h,



h, within the striking distance, he will then give to that ball the overplus of electricity he has received more than his natural quantity, by the stool on which he stands being connected with the conductor G.

26. If it is desired that weak sparks should be drawn from a person when standing on the stool, then the cord m should not be connected with the wooden clamp l, represented as fixed to a chair, Fig. 2.; but if it is desired to have stronger sparks, then the brass ring of the cord m must be connected with the stem of the joint d, and the other end rest on the floor; and if very strong sparks are required, then the end, instead of resting on the floor, must be connected with metal, such as the grate, &c. in the room; and if very weak sparks, the method mentioned § 12. Chap. III. may be used. There are other means of diminishing the quantity of electricity, which will occur to the practitioner.

27. If the stool be connected with the conductor R, and the person applies his arm as before, he will then receive a quantity of electricity from the ball h, to supply what he was deprived of by being connected with that conductor.

28. In Plate IV. Fig. 3. is shewn another method of receiving or giving sparks *from* or *to* the leg or any other part, according to the conductor with which the stool is connected by means of the flexible joints, the person standing on the stool, and turning the cylinder at the same time. This is done by means of the glass handle k, and one of the tubes f, with the piece g into which the short stem of k is put: one end of the cord m is screwed to the end of the tube which has the piece g, and the other part of the cord rests on the floor. If the person is unable to hold the glass handles himself, the sparks may be received *from* or given *to* him by another person standing on the floor. Here also, if strong sparks

F

are



are desired, the cord must be connected with metal, such as the grate, &c. as before directed in § 26.

29. Plate V. Fig. 1. represents the manner of giving gentle shocks through the elbow, or any other part. § 2. Chap. VI. It is necessary, before you attempt to give the shock, to try the jar and tube, whether they are not broken; to do which, take the wire, with the ball and glass tube, out of the blacked cork of the large jar; and wipe the uncoated part of the large jar, and the glass tube, clean and dry; but the large jar is not to be taken out, being fixed in the conductor: then replace the glass tube, and put the wire with the ball into the hole in the cork, and hang one ring of the chain b on it, and the other ring put on the knob P on the board E. Then put the electrometer n, Plate II, into the hole on the top of the conductor, and slide the ball of n within a quarter of an inch to the knob H on the side of the conductor, and hang on the



the chains and wire, as represented in Plate V. Fig. 1. except this difference, that instead of the ends of the chain being fastened to the arm, as represented, they must be made to touch one another on the table. Then if the large jar makes a discharge between the ball of the electrometer and conductor with a few turns of the cylinder AA, it shews that jar is whole. By removing the wire with the ball from the cork into the glass tube, it may be tried in the same manner. If either jar or tube is very damp, or has the least crack in them, there will be no discharge between the electrometer and conductor, if you turn ever so long.

The Machine being now ready for giving the shock, or vibrating motion; if smart ones are desired, the brass wire, with the ball, must remain in the hole in the cork; but if very gentle ones, such as the most delicate constitution can bear, which is peculiar to the patent Electrical Machine,



then the brass wire is to be removed from the cork, and put into the glass tube that is fitted into the said cork; and the communicator *u* is to be applied over the edge of the jar *S*, that one leg of it may touch the inside coating of the jar *S*, and the other leg the outside coating of the same jar. Plate V. Fig 1. It will be best that the communicator is put on that side of the jar which is furthest from the glass tube: the communicator thus connecting with the inside and outside coating of the jar, will prevent your receiving a smart shock from the large jar *S*, when preparing for gentle ones. \*

In both cases the electrometer must be regulated according to the shock or vibrating motion intended to be given: viz. if the smartest shock or vibrating motion of either jar or tube is wanted, the ball of the electrometer must be set at the furthest striking distance

\* *Note.* When smart shocks or vibrating motions are required, the communicator is to be taken away from the jar *S*.

distance from the knob H at the side of the conductor; and if the gentlest, the ball must be near the knob, but not touch it.

30. Plate V. Fig. 2. represents a person giving shocks along his leg; and in the same manner he may give it through any other part and in any direction, from the head to the foot, or from the foot to the head. In this case, he must have an assistant to turn the cylinder. An assistant will likewise be required in the operation of giving and receiving sparks, as described § 23 of this Chapter.

31. A very dense stream of electricity may be either received from, or given to any part of the body, by means of the jars when charged.

If the dense stream is to be received by the conductor R, which is connected with the outside of the jar therein, a chain is to be hung from the wire communicating with the inside of that jar to the table: the chain b must be hung on the knob H of the conductor



conductor G. The jar being charged, on applying any part of the body to the conductor R, a dense stream of electricity will go from that part of the body to the conductor R.

If the dense stream is to be given by the conductor G to any part of the body, the chain that is hung on the wire of the jar in the conductor R, is to be taken from thence, and hung in like manner from the wire of the jar, that is in the conductor G, to the table; the chain b is to be removed to the knob H of the conductor R: the jar being charged, the conductor G will give a dense stream of electricity to any part of the body presented to it.

If the chain, instead of touching the table, be hung, by means of its two rings, from the ball of one jar to the ball of the other, the stream will in like circumstances be exceedingly more pungent. This dense electricity may be received from or given to any part of the body, by means of the apparatus  
already

already described, according as the chain b is hung on the receiving or giving conductor.

---

## C H A P. V.

### PHILOSOPHICAL EXPERIMENTS AND OBSERVATIONS.

I. **T**HE intention of this Treatise not being to give a detail of the experiments relating to electricity, which are already well known, and amply described in other books; but rather to shew the convenience and advantage with which all experiments of this nature may be performed by the help of the machine which is now offered to the public patronage; this Chapter will not be very diffuse and extended. For the sake of beginners, I shall cursorily enumerate the laws, or leading phænomena  
of



of electricity, and subjoin a few experiments that, for their novelty, singularity, or the consequences to which they point, seem to deserve particular notice.

2. The easiest method of collecting a considerable quantity of the electric matter, is by rubbing two bodies together, by which means a condensation or rarefaction of the electric matter is produced at the surface of one or both of the bodies. But it is not a matter of indifference what kind of substance is used for this purpose. Some bodies will scarcely produce electric appearances by any rubbing together, and others possess the property of becoming electrified in a surprizing degree by that means. Now those bodies which, by friction or otherwise, become electrified in such a manner, that their electric state cannot be taken off by touching a small part of their surface, are called electrics. Glass, silk, rosin, sulphur, dry vegetable fibres, and common air, are the chief specimens of this class.

3. Bodies



3. Bodies, which, being by any means put into an electric state, are capable of losing that state by the contact of another body at a small part of their surface, are called Non-electrics, or, much more properly and frequently, Conductors. Metals, charcoal, animal juices, and water, are almost the only conductors we know of.

Every substance in nature is either an electric or a conductor. Since an electric cannot be deprived of its electricity at any part, without actually touching or approaching very near that part, it is evident, that the electric matter is not conveyed or conducted either through the substance, or over the surface of electrics. And since the whole electricity of a conductor may be taken away by touching any part thereof, it is likewise evident, that the electric matter does pass either through the substance or over the surface of these bodies. The internal sensation of the shock, is one of the most obvious proofs that

G

electricity



electricity passes through the substance of conductors.

4. The greatest quantity of electricity is collected, when a perfect electric is rubbed by a perfect conductor. But there are circumstances to be attended to, chiefly respecting the smoothness or roughness of the contiguous surfaces, which, for the sake of brevity, cannot be enumerated and described here.

5. The electricity which an electric acquires by friction with a conductor, is obtained from the conductor; so that, if the conductor be insulated, it will likewise become electrified, by losing a part of its natural quantity, or by gaining a surplus, according as the electric body acquires what is commonly called a negative or positive state. This has been in some measure explained in Chap. IV.

6. Bodies, in like and equal states of electricity, repel each other; bodies in opposite states attract each other; and bodies  
in

in the mean or natural state are attracted by all electrified bodies whatever.

7. If a thin electric plate, as, for example, glass, be electrified on one side, by friction or otherwise, and the other side be in contact with an uninsulated conductor, this last-mentioned side will assume an electric state, of the contrary nature to that induced upon the former. In these circumstances the glass is said to be charged. The law of charging electrics, appears to be, that the sum or whole quantity of electricity at both surfaces, is always either accurately or nearly the same. The following experiments, made with the Patent Electrical Machine, set this important principle in an obvious point of view.

8. Experiment I. Take off the ends of the two conductors R and G, and the included jars will be visible, the wires with the balls being stuck in the cork of each. Hang the chain b on the knob H of R, and turn the cylinder. The jar

G 2

in



in G will not, in these circumstances, become charged, excepting by means of a small quantity of electricity, which will pass from the ball of the jar into the air. But again, if the knuckle, or any other conductor, be applied near the ball of the jar in G, during the turning, sparks will issue from it in abundance, strong and frequent at first, but gradually less and less so, and the jar will become charged. The insulated jar being discharged, does not then appear to be in an electrical state on either side, except a small residuum, which is not carried off by the discharge.

The like experiment may be made, *mutatis mutandis*, by hanging the chain on the knob H of the conductor G.

9. Observation. Hence is deduced the consequence, that neither side of an electrical jar can be charged what is commonly called either positively or negatively, unless the other side be so situated, as to be able to assume the contrary state; and that the two  
states

states are equal in intensity, because they destroy each other in the discharge.

The electricity which passes off into the air, may perhaps make this consequence less evident to those who reason and think superficially. It arises from the power of the machine; and in many other common machines is scarcely perceptible. If the silk of the cushion be thrown back, much less electricity will be driven off.

10. Experiment II. Take the chain b off from H, and hang it upon the wires of the jars in R and G, by means of its two rings. Turn the cylinder about ten times. The jars will be equally charged, as appears by separately discharging them by means of the rod. If Nairne's new invented insulated discharging rod t, Plate II. be used, the electric fire will be seen to pass between the outside and inside of the jars, when they are discharged.

11. Experiment III. Repeat the last experiment with this variation, that, instead  
of



of separately discharging the jars, apply the luminous discharger from one conductor to the other. An explosion will follow, and both jars will be at once, by that means, discharged. The iron chain connecting the insides of the two jars, will, at the instant of discharging, be luminous; and also the inside of the luminous discharging rod t, Plate II. will appear beautiful at the same time.

12. Observation. It is clear, from these two foregoing experiments, that two equal electrical jars may be charged without communication with the earth, by only altering the quantities of electricity at their surfaces. The machine exhausts a quantity of the natural stock of electricity from the jar in R, and throws it upon the jar in G; while an equal part of the natural stock in the inside of the jar in G, removes by the chain to the inside of the jar in R. Thus both jars become charged, and may be separately discharged. But if a  
commu-

communication be made between the out-sides, the equilibrium is restored; and at the same instant the surplus, which had removed from the inside of one jar to that of the other, flies visibly along the chain, to its original place. The passage of the electricity between the two outsides, may likewise be rendered visible, if the luminous insulated discharging rod be made use of.

13. Experiment IV. The two foregoing experiments succeed in the same manner, when another chain is hung from one of the knobs H to the earth.

14. Experiment V. In the last experiment, if the chain, instead of communicating with the earth, be hung from the knob H to the wire of the same jar, the other jar only will be charged.

15. Observation. The charging of the jar in Experiment IV. whose outside communicates with the earth, is a consequence of the alteration which the state of the inside undergoes during the charging of the other jar. The uncharged jar, in Experiment

ment



ment V, remains in its natural state, because its two sides communicate by means of the chain. This jar may be regarded only as an insulated conductor, which conveys the electricity from the inside of the other jar to its outside; and the experiment affords the same consequence, with regard to a single jar, as Experiments III. IV. do with respect to two.

Experiment VI. Hang the chain from the knob H of one of the conductors, the other end resting on the table, and fit the electrometer to the other conductor. Hang the other chain from the electrometer to the wire of the jar in the conductor, to which the electrometer is fitted. Set the ball of the electrometer within the striking distance from H, and turn the cylinder. The electricity will be discharged visibly along the chain: but if the ball of the electrometer be placed close to H, the jar will not become charged, and no spark will appear.

Observation,

Observation. In this experiment, the jar in the first situation becomes charged, by the inside assuming, by means of the air, a state contrary to that superinduced on its outside; and the discharge shews the passage of the electricity in restoring the equilibrium. In the latter situation it is proved, that the inside, by its communication with the outside, not being allowed to assume the contrary state, the jar cannot be charged.

It is presumed that the following uncommon experiments will be acceptable to the curious.

16. Experiment VII.\* To make a number of small holes in a glass tube. Stop one end of the tube with a cork, and pour a quantity of fallad oil into it. Stop the other end with a cork, through which is previously inserted a wire, whose lower end is pointed, and bent at right angles to  
H its

\* This experiment was communicated by the Rev. Mr. Morgan, of Norwich.



its length, and its upper end turned into a hook. Let the inner end of the wire be below the surface of the oil; and hang the whole apparatus upon the knob H of one of the conductors. Then, if the conductor be electrified by turning the machine, and the finger, or any other uninsulated conductor, be brought near the lower end of the wire in the tube, a spark will pass to it through the oil and glass, making a small hole.

This experiment affords some beautiful appearances when tried in the dark, and on many accounts appears to be very fruitful in consequences.

17. Experiment VIII.\* To make the soft Dutch sealing-wax assume the appearance of wool.

Take

\* This experiment occurred to me, on trying the experiments mentioned in Nicholson's Introduction to Natural Philosophy, Vol. II. page 388. All the other experiments, except Experiment VII, are original.

Take a piece of sealing-wax, about an inch long, or less, and stick one end of it on the copper ball. Screw the ball to the joint; place the stem in the hole of one of the conductors, and hang the chain on the knob H of the other. In this situation warm the wax gently with a candle, till it is almost ready to drop. Remove the candle, and immediately excite the cylinder; at the same time holding the other copper ball, screwed to the end of the tube f, at about twelve inches distance from the wax. The electricity will immediately throw the wax upon the other ball in several very fine threads, which being wiped off with the finger, are scarcely distinguishable from red wool.

18. Experiment IX. To cause the mercury in a thermometer to rise by means of electricity.

Take a mercurial thermometer, with a small bulb. The wooden scale must be so short, as not to reach down to the bulb by

H 2

about



about three inches, which space will therefore be entirely clear. Prepare the machine as represented Plate III. Fig. 2. excepting that, instead of the copper balls, there must be substituted two balls of soft wood, about two inches in diameter. Suspend the thermometer so that its bulb may be immediately between the balls, which must not be more than half an inch asunder. Excite the cylinder, and a stream of electric matter will pass between the balls. The mercury will instantly begin, and continue to rise, till it exceeds its former height very considerably. I have raised it from 67 to 99 degrees of Fahrenheit's scale. The spirit thermometer is affected in a similar manner by the same treatment.

19. Experiment X. The spark given to a conductor, in what is called a negative state, is much more pungent than the spark received from a similar and equal conductor, in an equal positive state.

The

The proof of this by the Patent Machine, is too obvious to need any particular instructions.

The different figure of the spark appears to be the proximate cause of the phænomenon. For the spark proceeding from a positive conductor, is emitted from a single point of the surface; but when it has proceeded about one third of its length, it becomes divided into many radiations, springing from a kind of luminous speck. It does not therefore enter the hand of the observer at one, but at many points of the surface; and consequently its effects are divided and weakened. But the contrary happens when the conductor is in what is called a negative state, the ends of the spark being as it were reversed. The passage of the electricity is made through a single point, or small part of the skin of the observer, and the irritation becomes much greater.

Experiment XI. To cause the charge of three square inches and a half of coated glass  
to



to fly through the air in a dense spark of five or six inches in length.

Take off the ends, N N, of the conductors R and G. Remove the wires with balls from out of the corks withinside the jars; and put them in the small coated glass tubes that are in the corks; and hang the chain b from one wire to the other. Turn the cylinder; and, resting one ball of the insulated discharging rod upon the conductor G, bring the other ball towards the conductor R. If the machine be dry and in a good state, the discharge will fly, in dense sparks of more than six inches in length, from the ball of the discharging rod to the conductor R. But if, on the contrary, the one ball of the discharger be rested on the conductor R, and the other ball brought towards the conductor G, this last ball will draw off the electricity (superinduced on G), with a rustling noise, at the distance of six inches or more, and will not produce a spark till the distance is very small.

## C H A P. VI.

## MEDICAL OBSERVATIONS.

I. **T**HERE can be no doubt, since the electric matter is found in all bodies, but that it is an universal and principal agent in the system of the world. Much remains to reward the assiduity of future discoverers. Electricity is yet in its infancy; but, like the other branches of philosophy, its infancy has been embarrassed by a number of theories, contrived by men who prefer the effusions of fancy to the slow though sure method of experiment and observation. General inferences, drawn from experiments which were either few, inaccurate, or false, have in many instances disgraced the sciences. The influence of electricity on the animal frame has  
never



never been disputed ; but the success of its application to the cure of disorders has been exceedingly magnified by some writers, and as much slighted by others. The common source of both these opposite opinions may be attributed to the superficial observations of those who held them. But it is now established from a multitude of facts, that electricity is almost a specific in some disorders, and deserves to be held in the highest estimation for its efficacy in many others. It is not intended in this short treatise to give any circumstantial account of the cases upon which the following part of this chapter is grounded ; but the reader may depend upon it, that it contains not a single assertion which has not been confirmed either by the author's own experience, or the testimony of a numerous acquaintance of ingenious and worthy gentlemen, who are ready to promote any undertaking which is intended to advance the public good.

2. The early method of applying electricity consisted in giving large shocks from jars of very considerable magnitude. (See Note on § 3.) This practice is at present discontinued; and an opinion seems to prevail, that the gentler methods of simple electrization, such as receiving or giving the electric aura or wind by wooden or metallic points, and also the sparks either on the ground or electrical stool as circumstances may require, are sufficient in all those cases in which electricity can be used with advantage. It is difficult for one who thinks he has made a discovery, to avoid running into extremes; and perhaps, upon reflection, we shall not find reason entirely to exculpate those who so strenuously recommend those very gentle methods. It is certain, that the administering of shocks has done service in cases in which simple electrization has not been found effectual; and therefore it would be injudicious to attempt to establish any general rule for



excluding them. And on the contrary it must be granted, not to mention the disagreeable sensation to the patient, that very strong shocks are sometimes injurious, and, if they do not produce an immediate good effect, are often found to be of very little service when continued. The medium seems preferable; that is to say, to begin with simple electrization, and to proceed gradually, as may be thought necessary, either to receive or give the electric matter by metallic or wooden points; or the sparks, by rubbing a metallic ball quickly backwards and forwards over a part of the body covered with a woollen cloth; to receive or give sparks of different sizes, when either placed on the stool, or standing on the ground, as directed § 12. Chap. III. or § 28. Chap. IV; to draw the dense stream as directed § 31. Chap. IV; or to give gentle shocks, which may be either general, or confined to a particular part, as described § 29 and § 30, Chap. IV.

A little



A little experience will enable the operator to judge the proper degree of electricity; and the Patent Machine is peculiarly applicable to every known method of applying it.

3. The opinions of the Faculty are divided concerning the mode of action which electricity exerts on the human frame. By some it is thought to relax universally, and by others to be stimulant and bracing. Both opinions seem to agree with the facts. Electricity, applied in the gentlest manner, appears to be sedative and relaxing; and in the stronger methods it may naturally be supposed to stimulate.\* But it is an advantage, that we are not under the necessity of waiting till a theory is established, before we can receive benefit from

I 2

the

\* *Note.* Those whose case may require rather strong shocks, may remove every fear they have of being injured by them; the Patent Electrical Machine being so constructed, that the strongest shock that can be administered by it, can no way detriment the most delicate constitutions.



the powerful, though safe, application of electricity.

3. The very many cures performed by electricity in the hands even of persons entirely unskilled in medicine, and its never having produced any ill effects when applied with moderate degrees of force, give it an advantage which perhaps no other remedy is entitled to claim. It may be laid down as an established fact, that electricity judiciously applied has never done hurt. A healthy fibre is never injured by it: it may consequently be conveyed without any difficulty or apprehension to the seat of any local disorder, as it may be passed, without any diminution of its virtue, through the intervening sound parts.

5. Simple electrization, or standing on the stool, is affirmed to increase the circulation of the blood, and promotes glandular secretion.

6. The various applications of electricity are particularly serviceable in obstructions

tions. In many disorders, whose remote causes are of this nature, its action and effects are beyond expectation. The suppression of the catamenia and all its consequent evils are removed to almost an absolute certainty, by passing the electric matter through the region of the pelvis. Very many instances of patients relieved from the most hopeless situation, conspire to recommend this remedy as specific in such cases; and the advantages mankind may reap from it are so much the more valuable, as the *Materia Medica* furnishes us with few medicines at all adequate to the purpose. The method of administering electricity for these disorders is to place the patient between the two balls *h h*, Fig. II. Plate III. placed on opposite sides of the waist; and accordingly as the sensation is more or less disagreeable, the balls must be removed nearer to or farther from, the body. In some instances, the points may be substituted instead of the balls. Care must be  
 taken



taken to be assured, that the patient is not pregnant; and the electricity should rather be too weak than too strong, for fear of producing an immoderate flow.

7. Nervous disorders in general give way to gentle electrization, but are sometimes aggravated by the application of too great a force. Nervous head-aches are often mitigated and entirely relieved by the electric wind from a metallic or wooden point, applied at a distance opposite the temples, and successively round the head. The effects of too much irritation are so exceedingly disagreeable, that great attention must be had to make trial first of the mildest methods.

8. In recent bruises, burns, scalds, or any other local pain of no long standing, numberless instances establish the immediate efficacy of electricity. The electric wind or sparks may be used in these cases.

9. The natural secretions are promoted by electricity, and those which are adventitious

titious or unnatural are retarded and often suppressed. The latter effect seems to be a consequence of the former; for most unnatural discharges are caused by the obstruction of some natural secretion or circulation which ought to have been performed. Thus the proximate cause of the purulent discharges of ulcers, &c. is either the stoppage of the circulation or the perspiration of the part, whose vessels are inflamed or obstructed; and if electricity be possessed of power to promote a proper circulation through the finer passages, the vicious discharge must cease of course. It seems to be a good method in superficial complaints to administer the aura or sparks; but in disorders which principally affect the interior part of the body, gentle shocks are to be preferred.

10. Blood-shot, and other inflammations of the eyes, are almost always cured by the electric wind. The fistula lachrymalis has been cured, in many instances, by the same treatment.



treatment. And there are not a few remarkable cases, in which blindness, whether arising from an opacity of the cornea, or the insensibility of the retina, has been removed by electricity, applied either in the form of wind or sparks to the eye itself, or shocks passed near the eye. But it must be confessed, that it has failed in many other instances of this last kind.

11. The tooth-ache, arising from cold, is generally cured by drawing the sparks from the outside of the face opposite the tooth. A shock properly directed through a tooth beginning to decay, frequently takes away the pain by destroying the sensibility of the end of the nerve.

12. The fore throat is very often cured by drawing sparks; and the same method is frequently successful in dispelling glandular tumours, even of the greatest magnitude. Generally speaking, all swellings which do not contain matter are dispersed by electricity; and those which do, are benefited

fited by it. Cutaneous eruptions are often cured by the electric wind.

13. Deafness from cold, from too much wax, or proceeding from a fever, seldom fails of being removed by the electric aura, by drawing sparks, or by gentle shocks from one ear to the other.

14. Sprains, cramps, contractions, among which the locked jaw stands confirmed by many successful cases, and few to the contrary; rheumatic pains, whether local or otherwise; are all peculiarly within the province of the electrical operator, as they have been constantly removed with scarcely any exception. The method is, to use repeated gentle shocks through the part affected, and increase the force till success attends: but in these, as in all other cases, the feeling of the patient must be consulted; for shocks that have been given from very large jars, have been frequently found to be very disagreeable, without being effective: but such attention has been paid in



the construction of the Patent Electrical Machine, that the strongest shocks requisite for any disorder may be given, by this machine, without any danger to the person requiring them.

15. The sciatica, the proper gout, and the palsy, have been often cured by electricity, applied according to the various degrees. The first of these disorders is much more capable of relief from electrical treatment than the other two. It is thought by some, that there is danger of repelling the morbid matter of the gout from the extremities to the nobler parts; but this opinion does not seem to have any solid foundation. In recent palsies, much good has been done, even on patients far advanced in years; but palsies of long standing, though relieved at first, are seldom effectually cured. The most judicious method appears to be that of first drawing sparks from the diseased part, and afterwards to give shocks confined to the part, rather strong at first, but

but weaker as the sense becomes more acute.

16. Considerable cures have been performed by electricity in epileptic and hysterical cases. A few gentle shocks administered during the fit from arm to arm through the chest, almost infallibly removes these disorders; and a daily continuation of the remedy for some days after, has prevented the return in many cases in which the disorder had long been habitual. When the period is known, or the approach of a fit can be predicted, a few gentle shocks may perhaps avert the evil.

17. Agues are cured by administering shocks through the chest and sides, or cross-ways, from each hand to the opposite foot, just before the fit is expected. This disorder is commonly cured by a very few times electrifying.

18. The Patent Electrical Machine is superior to others, by the means it affords of trying the medical effects of electricity,



as you may either give it to any part of the body, and at the same instant receive it from any other part. See § 17, 23. Chap. IV. and Plate III. fig. 2, 6; and if the insulated stool O be connected with the conductor R, by means of the metallic tubes fff, and compound joint d, a person standing on the stool, and touching the conductor G, may make the electrical fluid to circulate through him, or any part of him, as long as he pleaseth; previous care being taken that the chain b is removed from either of the conductors, and that the metallic tubes touch not the table. And if connected only with the conductor R, the chain b being hung on the brass knob H of the conductor G, he may keep himself in an exhausted state of electricity; and *vice versa*, being conducted only with the conductor G, and the chain removed to the brass knob H of the conductor R, he may keep himself in a condensed state of electricity. See fig. 1. Plate IV.

19. The very sudden cures which are daily performed by electricity, and the exaggeration which is made in relating facts by those who are fond of the marvellous, have led many patients into an expectation, that their disorders will vanish as it were by enchantment, when they are electrified. It is not enough for these mistaken people to be informed, that electricity, both for its universality and efficacy, deserves to stand first in the list of remedies; but they require it to work miracles. For this reason, and to prevent the discouragement which the disappointment of their unreasonable expectations may cause, it is necessary to observe, that instantaneous relief must not always be expected; and that several disorders, which were not sensibly affected by a month or more electrization, have in time been cured by persevering in the use of the remedy. It is probable, that many of the cases in which electricity has failed, would have been crowned with



with success, if the opinion of its inefficacy had not been too hastily adopted.

20. The reader, who may be inclined to think the assertions contained in this chapter, stand in need of the support of the facts, is referred to the Philosophical Transactions; Becket's Essay on Electricity; Cavallo's Essay on the Theory and Practice of Medical Electricity; Birch's Considerations on the Efficacy of Electricity, in removing Female Obstructions; New thoughts on Medical Electricity, or an Attempt to discover the real Uses of Electricity in Medicine; Symes's Fire analysed; Lovett's Subtil Medium proved; and Wesley's Desideratum; in all which he will find a variety of well-attested cases.

\* \* \* The number of applications which have been made to Mr. Nairne, by patients desirous of receiving the benefit of medical electricity, renders it necessary for him

him respectfully to inform the public, that his other avocations make it impossible for him to attend to any applications of that nature.

When leisure permits, Mr. N. proposes to publish some papers on electricity, formerly communicated by him to the Royal Society, and which have been since printed in the Philosophical Transactions. The references are as follow : Experiments on metals, animals, and vegetables, Vol. 64 ; on the advantage of elevated pointed conductors, Vol. 68 ; on the effect of electricity in shortening wire, Vol. 70 ; an account of the same effect produced by lightning, Vol. 72.

PRICES




him respectfully to inform the public, that  
his other avocations make it impossible for  
him to attend to any applications of that  
nature.

When lecture begins, Mr. N. proposes  
to publish some papers on electricity, for-  
merly communicated by him to the Royal  
Society, and which have been since printed  
in the Philosophical Transactions. The  
references are as follow: Experiments on  
metals, animals, and vegetables, Vol. 64;  
on the advantage of clayed pointed con-  
ductors, Vol. 68; on the effect of electricity  
in shortening wire, Vol. 70; an account of  
the same effect produced by lightning,  
Vol. 72.











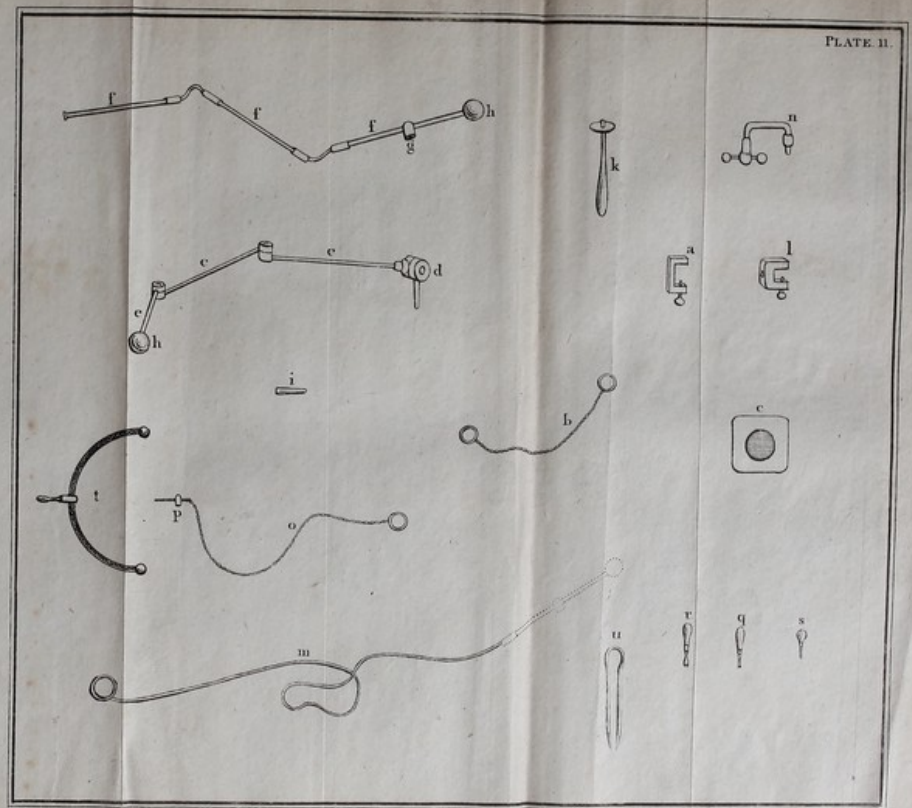






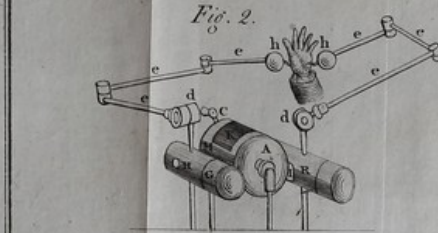







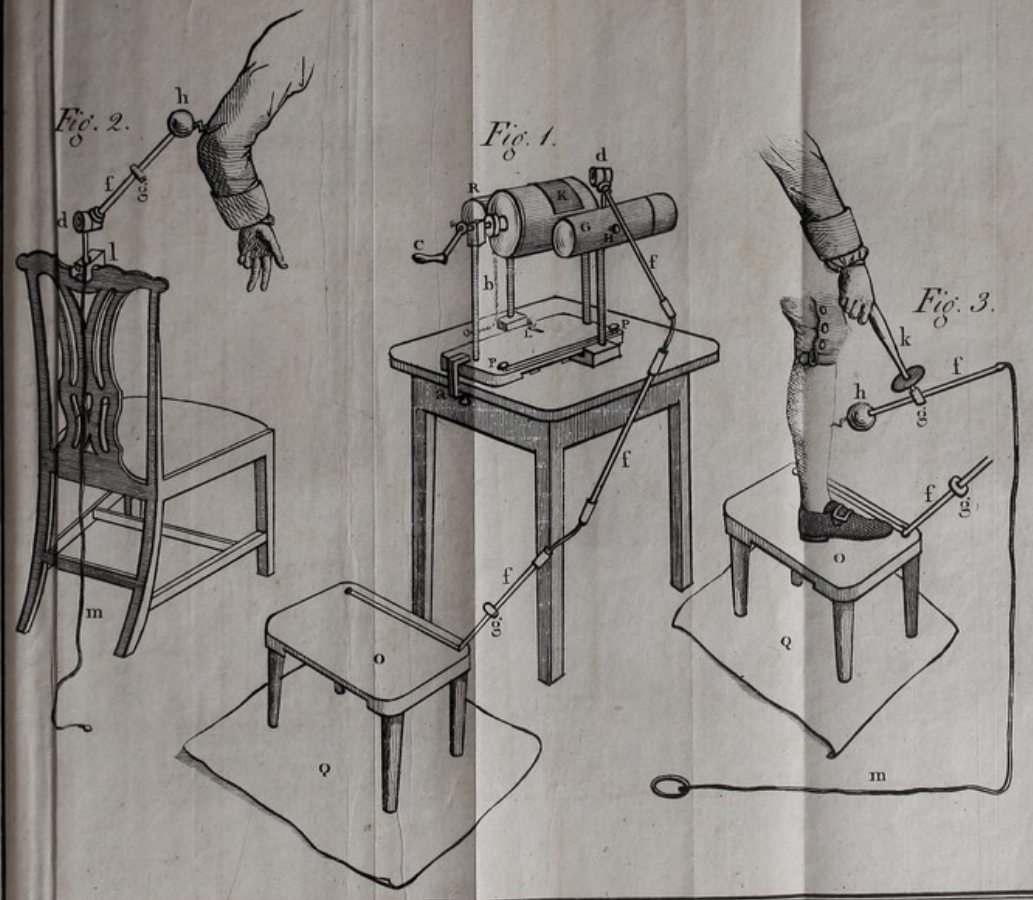




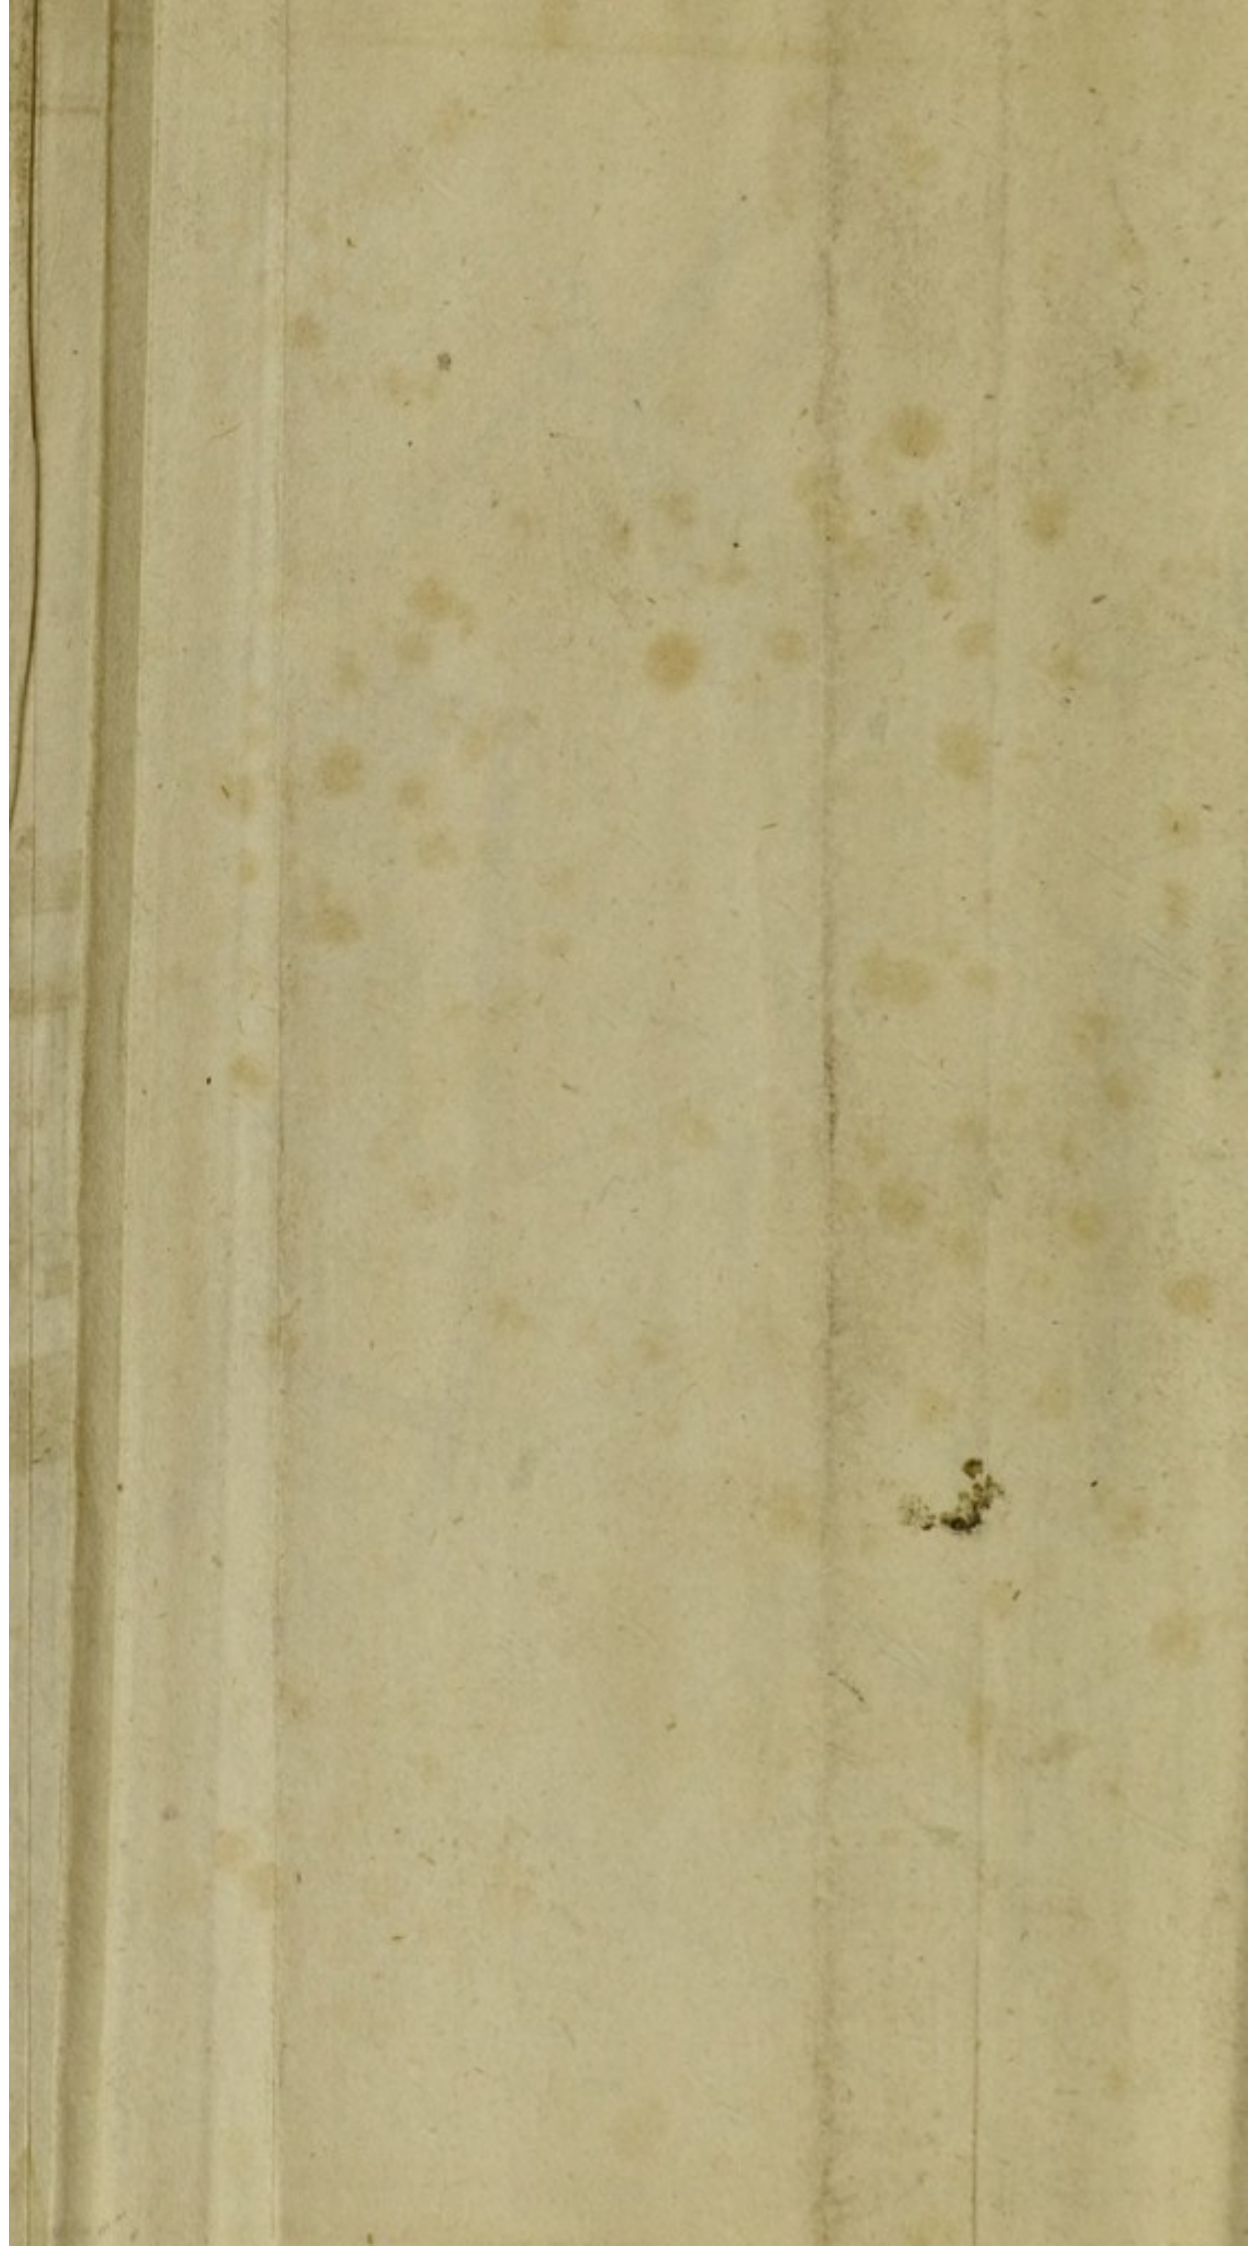

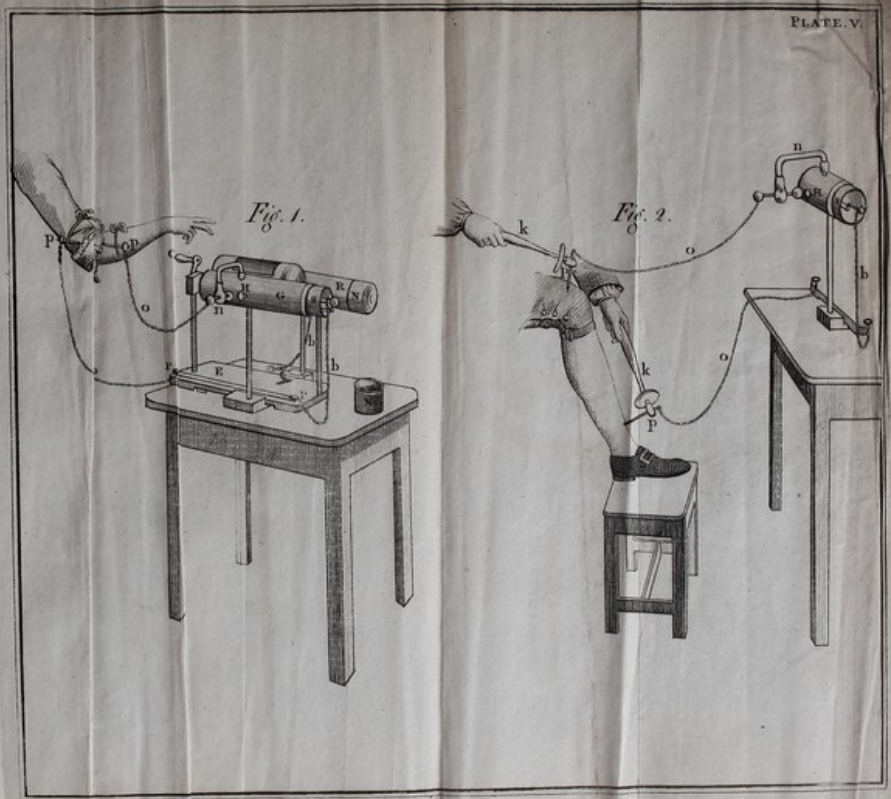



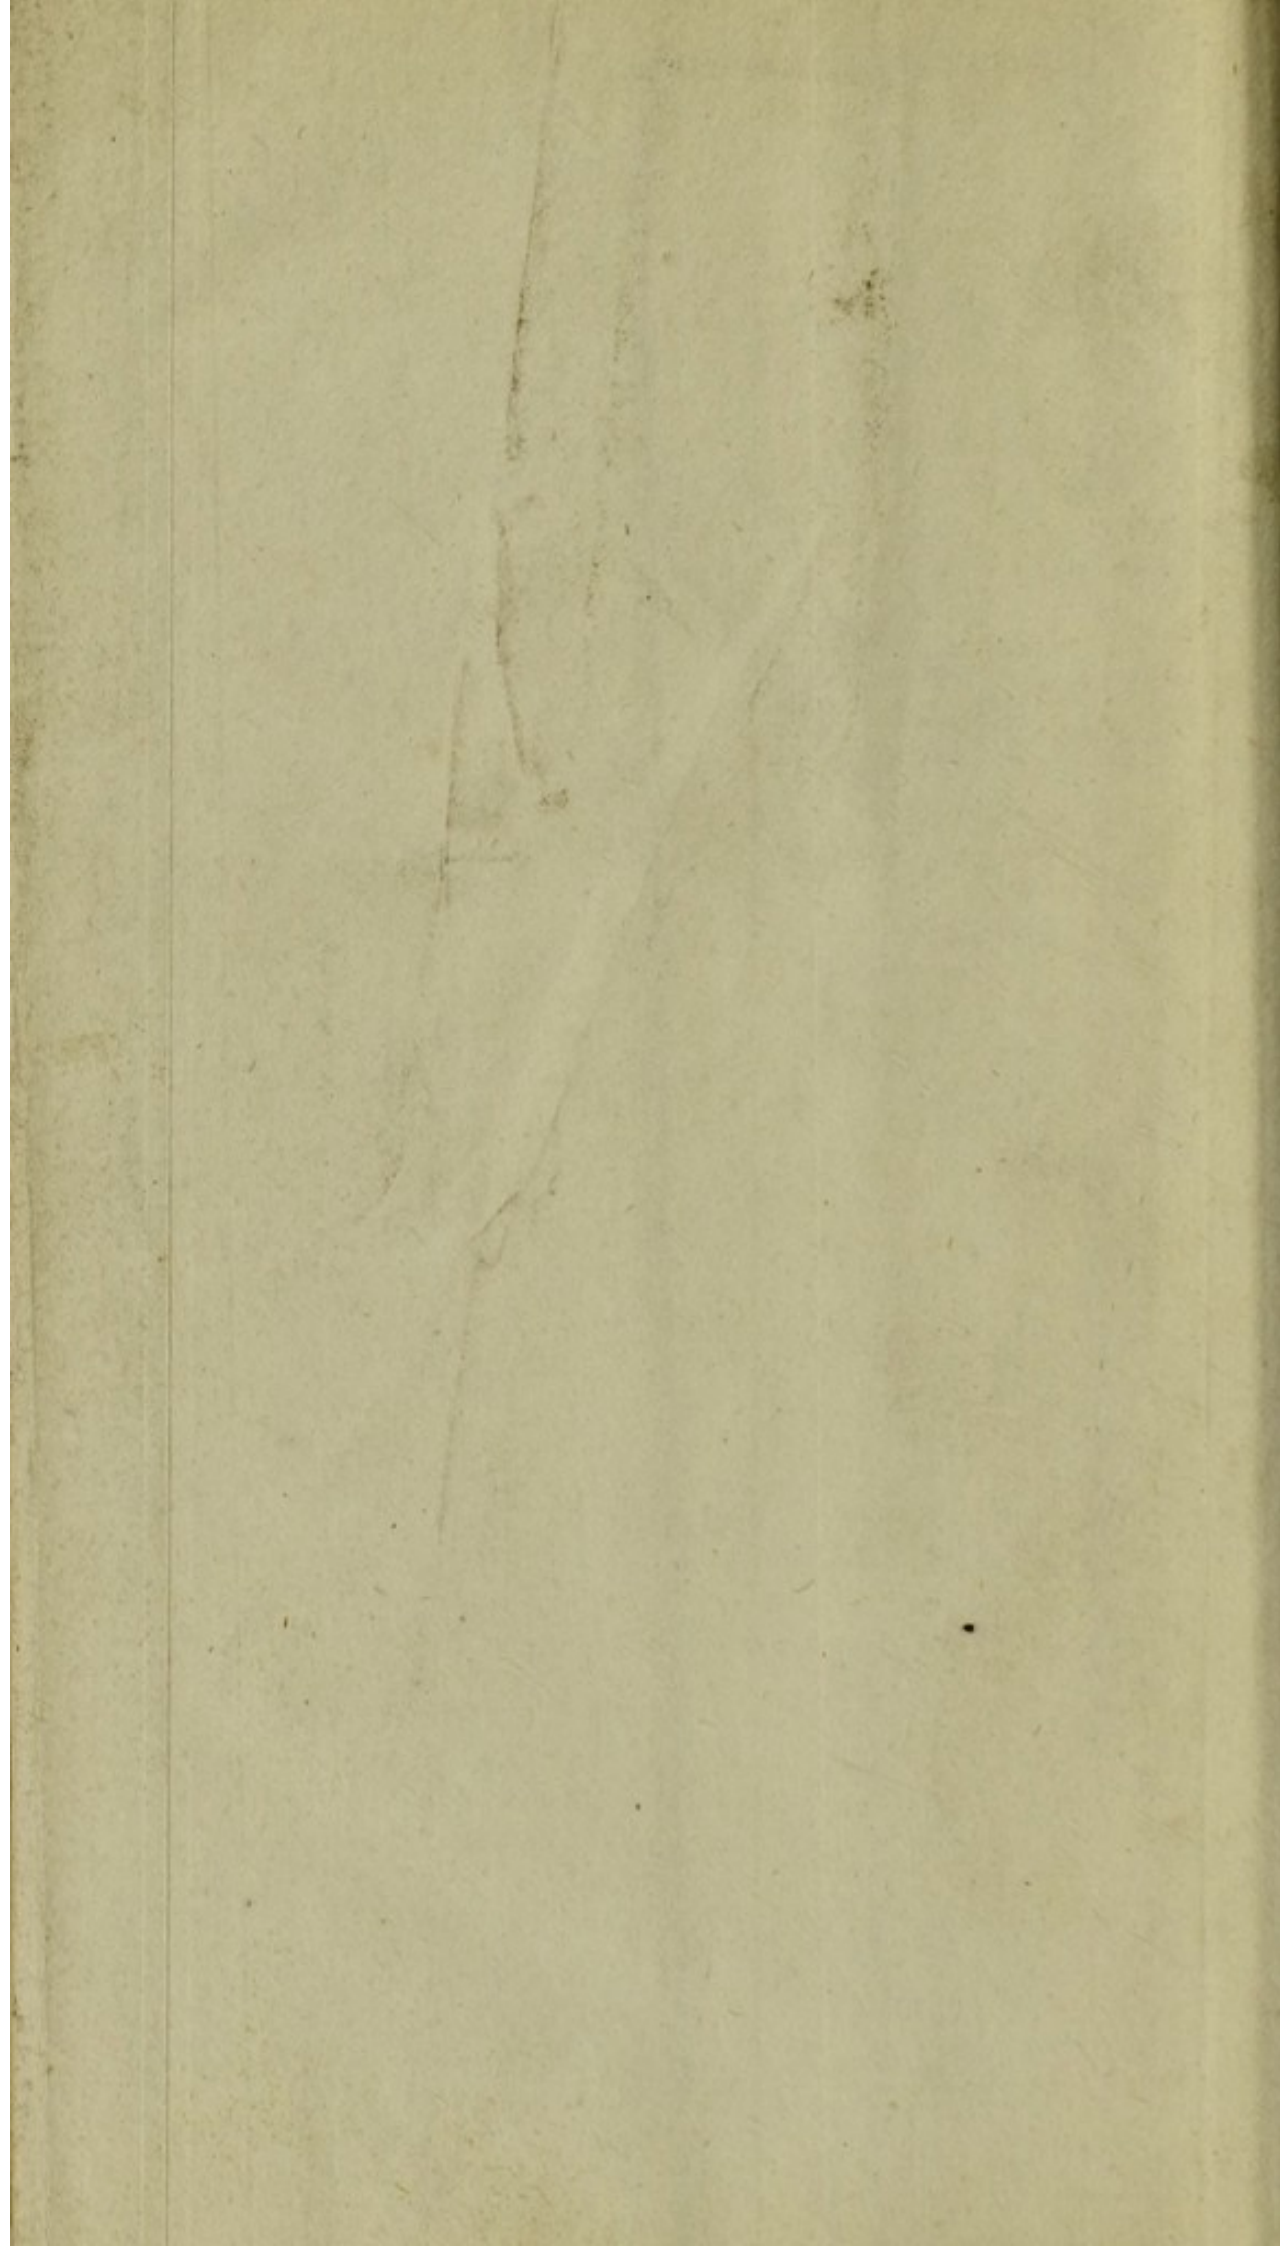

PRICES of *NAIRNE's* PATENT ELECTRICAL MACHINES, and some of the various PHILOSOPHICAL, MATHEMATICAL, and OPTICAL INSTRUMENTS, made and sold by *NAIRNE* and *BLUNT*, No. 20, in *Cornhill*, opposite the *Royal Exchange*, London.

Electrical Instruments.

<b>A</b> Patent Medico-Electrical Machine, Cylinder about five Inches Diameter, with two Conductors, a Medical Jar and Tube in one Conductor, Electrometer, two Sets of Flexible Tubes and Joints, two insulated Handles; a Pair of Directors for giving gentle Vibrations or Shocks, through any Part of the Body; three Pairs of different sized Metal Balls; two Brasses and two Wood Conical Points, Chains, Clamp, and Box of Amalgam—in a coloured Deal Box	£ 5 5 0
<b>A</b> Patent Medico Electrical Machine, Cylinder about seven Inches in Diameter, with two Conductors, a Medical Jar and Tube in one Conductor, Electrometer, two Sets of Flexible Tubes and Joints, two insulated Handles, a pair of Directors for giving gentle Vibrations or Shocks through any Part of the Body, three Pair of different-sized Metal Balls, two Brasses and two Wood Conical Points, Chains, Clamp, and Box of Amalgam, in a coloured Deal Box	7 17 6
Ditto, ditto, as above, with the addition of a second Medical Jar for the other Conductor, two sets of stiff Joints, and two compound Joints, (in lieu of the simple Joints), forked Keys, Screw-driver and Pointil, in a coloured Deal Box	10 10 0
Ditto, ditto, as above, with a Wood Clamp, Metallic Cord, an insulated Stool, and luminous discharging Rod, in a coloured Deal Box	12 12 0
L	Although



Although the above Machines are more particularly constructed for Medical Purposes, they are equally applicable to Philosophical Uses, and will be found to produce a greater quantity of Electric Fire, than any Machine, of the same size, hitherto made; and have also sufficient strength for any medical purpose whatever; to which they may be applied. They have likewise this superior advantage, in answering the purpose of a person being electrified at the same time with two Electrical Machines; for, while it receives the Electric Fluid from one part of the body, it will give it to any other part desired.

Any person that may be desirous to try the medical effects of Electricity, without purchasing the Electrical Machine, is respectfully informed, he may have the Use of either of the before-mentioned ones, on depositing the value of the Machine before its delivery; and what remains of the sum deposited, after deducting Ten Shillings and Sixpence for any time less than a Week, and Eighteen-pence for every day after that it is in his possession; the expence for any damage that it may have sustained from the time of delivery to its return, and the carriage. After these various expences are deducted, what then remains of the sum deposited, shall be paid on the return of the Machine.

*N.B.* No Machine will be lent, without its value is deposited before the delivery.

Electrical Machines for common

Electrical Experiments	-				4	4	0
Patent Electrical Machines, on a larger scale than those before mentioned, from	-	16	16	0	to	168	0 0
Electrical Batteries, from	-	2	12	6	to	92	8 0
Electrical Jars, from	-	0	7	6	to	0	0 0
Diamonded Jar	-					0	10 6
Belted Jar, or Analysis of the Leyden Vial	-					0	16 0
Double Jar	-					0	16 0
Magical Picture	-					0	12 0
							Nairne's



	£. s. d.	£. s. d.
Nairne's Luminous Discharging Rod - - -		0 7 6
Insulated Jointed Discharging Rod - - -		0 10 6
Universal Discharger - - -		1 10 0
Jar and Electrometer - - -		1 10 0
Quadrant Electrometer - - -		0 7 6
Gold-Leaf Electrometer - - -		0 14 0
Cavallo's Electrometer - - -		0 14 0
A Thunder-House - - -		0 5 0
A Powder Magazine - - -		0 15 0
A Pyramid - - -		0 12 0
A Boat - - -		0 18 0
A Set of Bells - - -		0 9 0
A Set of Bells, mounted on a Stand - - -		1 1 0
Plates and Images - - -		0 6 0
Jar and Artificial Spider - - -		0 12 0
A Set of Musical Bells - - -		1 11 6
Luminous Conductors, from - - -	1 1 0 to	1 16 0
Exhausted or Luminous Flask - - -		0 10 6
Spiral Tubes, from - - -	0 7 6 to	0 10 6
Set of Spirals, with Flyer - - -		1 16 0
Luminous Words, from - - -	0 16 0 to	1 11 6
Electrical Star - - -		0 18 0
An Electrical Planetarium - - -		3 3 0
Electrical Orrery - - -	} to be set in motion by the electric fluid	1 6 0
A Set of Paper Models - - -		3 0 0
Flyer and Point - - -		0 4 0
Electrical Pistols, from - - -	0 7 6 to	1 16 0
Ditto, mounted in sets - - -		1 2 6
Electrical Tinder-Box - - -	} for inflammable air	3 10 0
Ditto, smaller, with Electro- phorus - - -		2 12 6
Electrophorus, from - - -	0 7 6 to	4 4 0
Electrical Canon for Gun- powder - - -		0 15 0
Electrical Sportsman - - -		2 12 6
Insulated Stools, from - - -	0 12 0 to	0 18 0
Conductors for Ships, to preserve them from the dangerous Ef- fects of Lightning - - -		
Ditto for Buildings - - -	L 3 3 0 to	7 7 0
	L 2	Also



Also, all the different Electrical Apparatuses, either for Amusement, or Philosophical Uses, hitherto known.

# Optical Instruments.

Best Double-joint Silver Spectacles, with Glasses	-	-				1	1	0
Ditto ditto Silver Spectacles, with Brazil Pebbles	-	-				1	16	0
Ditto Single-joint, Silver, with ditto	-	-				1	10	0
Ditto ditto, ditto Spectacles with glasses	-	-				0	15	0
Ditto, Double-joint Steel ditto, with ditto	-	-				0	10	6
Another Sort ditto	-	-				0	7	6
Another Sort ditto, for Ladies						0	10	6
Best Single-joint Steel Temple Spectacles	-	-				0	5	0
Another Sort ditto	-	-				0	2	6
Other Sorts ditto, at per Dozen	0	12	0	to		1	4	0
Spectacle Cases, from	-	0	1	0	to	2	2	0
Nose Spectacles, mounted in Silver						0	7	6
Nose ditto, in Tortoiseshell, and ditto	-	-				0	4	0
Ditto ditto, in Horn and Steel	-					0	1	6
Other Sorts ditto, at per Dozen	0	3	6	to		0	14	0
Spectacles with green Glasses; also green Shades for Weak Eyes	-	-						
Concave Glasses in Horn Boxes, for short-sighted People	-					0	1	6
Ditto ditto, mounted in Tortoiseshell and Silver, Pearl and Silver, &c. at various Prices								
Reading Glasses, from	-	0	2	6	to	1	16	0
Burning ditto, from	-	0	1	0	to	0	4	6
Small Pocket Magnifying Glasses for Watch-makers, &c. from		0	1	0	to	0	5	0
								Concave

	£.	s.	d.		£.	s.	d.
Concave and Convex Mirrors, in Frames, from - -	0	7	6	to	50	0	0
Cylindrical ditto, in ditto, from	1	1	0	to	13	13	0
Opera Glasses, from - -	0	7	6	to	0	16	0
Ditto, in Silver, from - -	1	11	6	to	4	4	0
Ditto, in Gold - - -							
Refracting Telescopes, of various Lengths, from - - -	0	7	6	to	1	11	6
Ditto, to use at Sea by night -	1	11	6	to	2	12	6
Ditto, ditto, with Achromatic Object Glasses, from - -	1	1	0	to	76	0	0
An Achromatic Telescope, about 30 Inches long, with two Sets of Eye-Glasses; the one mag- nifying about 40 times, for Day, and the other about 75 times, for Astronomical Pur- poses, in a neat portable Ma- hogany Box - - -					10	10	0
Also all the various sorts of Achromatic Telescopes, par- ticularly those of one, two, three, and four feet long, with Brass Drawers, which shut up commodiously for the Pocket, from - - -	2	12	6	to	13	13	0
Achromatic Perspective Glasses for the Pocket, of various Prices, from - - -	1	1	0	to	4	4	0
Reflecting Telescopes, six Feet long, with four magnifying Powers, and Rack Work, on Mahogany Stand - - -	105	0	0	to	150	0	0
Ditto ditto, four Feet long, with four magnifying Powers - -	78	15	0	to	100	0	0
Ditto ditto, three Feet long, with ditto - - -	40	0	0	to	56	0	0
Ditto ditto, two Feet long, on Brass Stands, with ditto -	18	18	0	to	30	0	0
Ditto ditto, two Feet long, with							

ene



	£. s. d.		£. s. d.
one magnifying Power, on a three-legged Brass Stand -			12 12 0
Ditto ditto, 18 Inches long -			8 8 0
Ditto ditto, 12 Inches long -			5 5 0
Double-reflecting Microscopes, from - - -	4 14 6	to	7 17 6
Solar Microscopes, with complete Pocket Microscope -			5 5 0
Opaque Microscopes, from -	2 2 0	to	3 3 0
Ellis's, or Aquatic ditto, with adjusting Screw -			2 12 6
Pocket Microscopes, from -	0 6 0	to	3 13 6
Camera Obscuras, from -	0 16 0	to	7 17 6
Optical Machines for viewing perspective Prints, from -	0 18 0	to	1 16 0
Sciopic Balls and Sockets -			0 7 6
Glass Prisms, from - -	0 7 6	to	2 2 0
Magic Lanthorns - -			1 8 0
Paintings for ditto, from Eight Shillings per dozen Squares, to Metal Cylindrical Mirror, with Set of Prints - -			1 10 0
			2 2 0

### Mathematical Instruments.

Globes, 28 Inches Diameter, in Mahogany Frames, with sil- vered Meridians, &c. complete			52 10 0
Ditto, ditto, in Wainscot Frames			40 0 0
Ditto, 17 Inches, in ditto -			6 6 0
Ditto, 15 ditto, in ditto -			5 5 0
Ditto, 12 ditto, in ditto -			3 6 0
Ditto, 9 ditto, in ditto -			2 2 0
Ditto, 6 ditto, in ditto -			1 16 0
Ditto, 3 ditto, in Fish Cases, for the Pocket - -			0 10 0
Hadley's Quadrants, from -	1 16 0	to	6 6 0
Hadley's Sextants, with adjusting Screw and Telescope, for de-			

termining

	£. s. d.		£. s. d.
termining the Longitude at Sea, from - - -	6 16 6	to	15 15 0
Parallel Glass, with adjusting Screw and Level, for an arti- ficial Horizon - - -			
Theodolites, from - - -	4 4 0	to	11 11 0
Ditto, better Sort, with Ground Levels, from - - -	18 18 0	to	31 10 0
Circumferentors, from - - -	2 2 0	to	4 14 6
Plain Tables, with Staff, Ball, and Socket - - -	4 14 6	to	5 15 6
Perambulator, or Measuring Wheel Level Telescopes and Apparatus, at different Prices - - -	6 6 0	to	10 10 0
Pentagraphs for copying Draw- ings, from - - -	2 12 6	to	5 5 0
Cases of Drawing Instruments, from - - -	0 7 6	to	30 0 0
Ditto ditto, the Instruments of Silver - - -			
Proportionable Compasses - -			
Beam Compasses and Elliptical Compasses - - -			
Azimuth, Cabin, and all other Sea Compasses, of various Prices			
Horizontal Sun-Dials, from - -	0 15 0	to	8 8 0
Universal Ring-Dials, from - -	0 7 6	to	4 4 0
Ditto ditto, with Compass-Box, Needle, Levels, adjusting Screws, &c. - - -			21 0 0
Meridian Telescopes, or } Transit Instruments - }			
Astronomical Quadrants - -			
Equatorial Telescopes - - -			
Dipping Needles of a new Con- struction - - -			
Levels whose inner Surfaces are ground, from - - -	1 11 6	to	30 0 0
Ditto, common, from - - -	0 12 0	to	1 11 6
			Gunter's



		£.	s.	d.		£.	s.	d.
Gunter's Chains	-	-	-	-				
Ditto Quadrants, from	-	0	3	6	to	0	5	0
Sutton's ditto, from	-	0	5	0	to	0	10	6
Davis's ditto, from	-	0	10	6	to	0	16	0
Gunner's Callipers	-	-	-	-				
Protractors, from	-	0	1	6	to	2	12	6
Parallel Rules of all Sorts, from	-	0	3	6	to	2	2	0
Gauging Rods, Gunter's Scales, and all other Kind of Rules	-	-	-	-				
The Regular Solids, or Platonic Bodies, cut in Wood	-	-	-	-				


### Philosophical Instruments.

Pocket Travelling Compasses, of a peculiar Construction, from	0	7	6	to	3	13	6
Air Pumps, of different Kinds, from	3	3	0	to	40	0	0
Apparatus to ditto	-	-	-				
Air Pumps of Mr. Smeaton's Construction	-	-	-				
Barometers	-	-	-		1	16	0
Ditto	-	-	-		2	12	6
Ditto, with Thermometers	-	-	-		3	13	6
Ditto, with ditto, and Hygro- meter	-	-	-		4	4	0
Marine Barometers, which have been found, by Experience, to foretell Storms at Sea, Hours before they come on	-	-	-		10	10	0
Thermometers in Mahogany Boxes, Fahrenheit's Scale	-	-	-		1	11	6
Ditto ditto, with Fahrenheit's and Reaumur's ditto	-	-	-				
Ditto, on Box Scales	-	-	-		1	1	0
Pocket Thermometers in Fish Cases	-	-	-		1	1	0
Ditto ditto, with Fahrenheit's and Reaumur's Scales	-	-	-				
							Botanic

	£.	s.	d.		£.	s.	d.
Botanic Thermometers -					0	13	0
Brewer's, &c. ditto, in Tin Cases					0	12	0
Ditto, with Metal Scales and Boxes - - -							
N. B. The Scales of these Thermometers are graduated according to the Bores of their respective Tubes							
Glass Bubbles in Mahogany Boxes, with Thermometers, as used in the West-Indies, to prove Rum, Brandy, &c -					1	10	0
Hygrometers in Brass Boxes -					0	12	0
Ditto, of Mr. Smeaton's Construction - - -					2	12	6
Air Fountains, in Copper, with complete Set of Jets -	3	13	6	to	6	6	•
Ditto ditto, to play fired Spirits							
The Mechanic Powers, neatly made in Brass, consisting of the Wheel and Axle, the Pulley, Weights, the Wedges, inclined Plane and Roller, and the different Kinds of Levers -					25	4	0
Hydrostatic Balances, with complete Apparatus - -	3	13	6	to	16	16	0
Artificial Magnets, from -	0	1	6	to	10	10	0

All other Optical, Mathematical, and Philosophical Instruments, made according to their latest Improvements, at the lowest Prices.



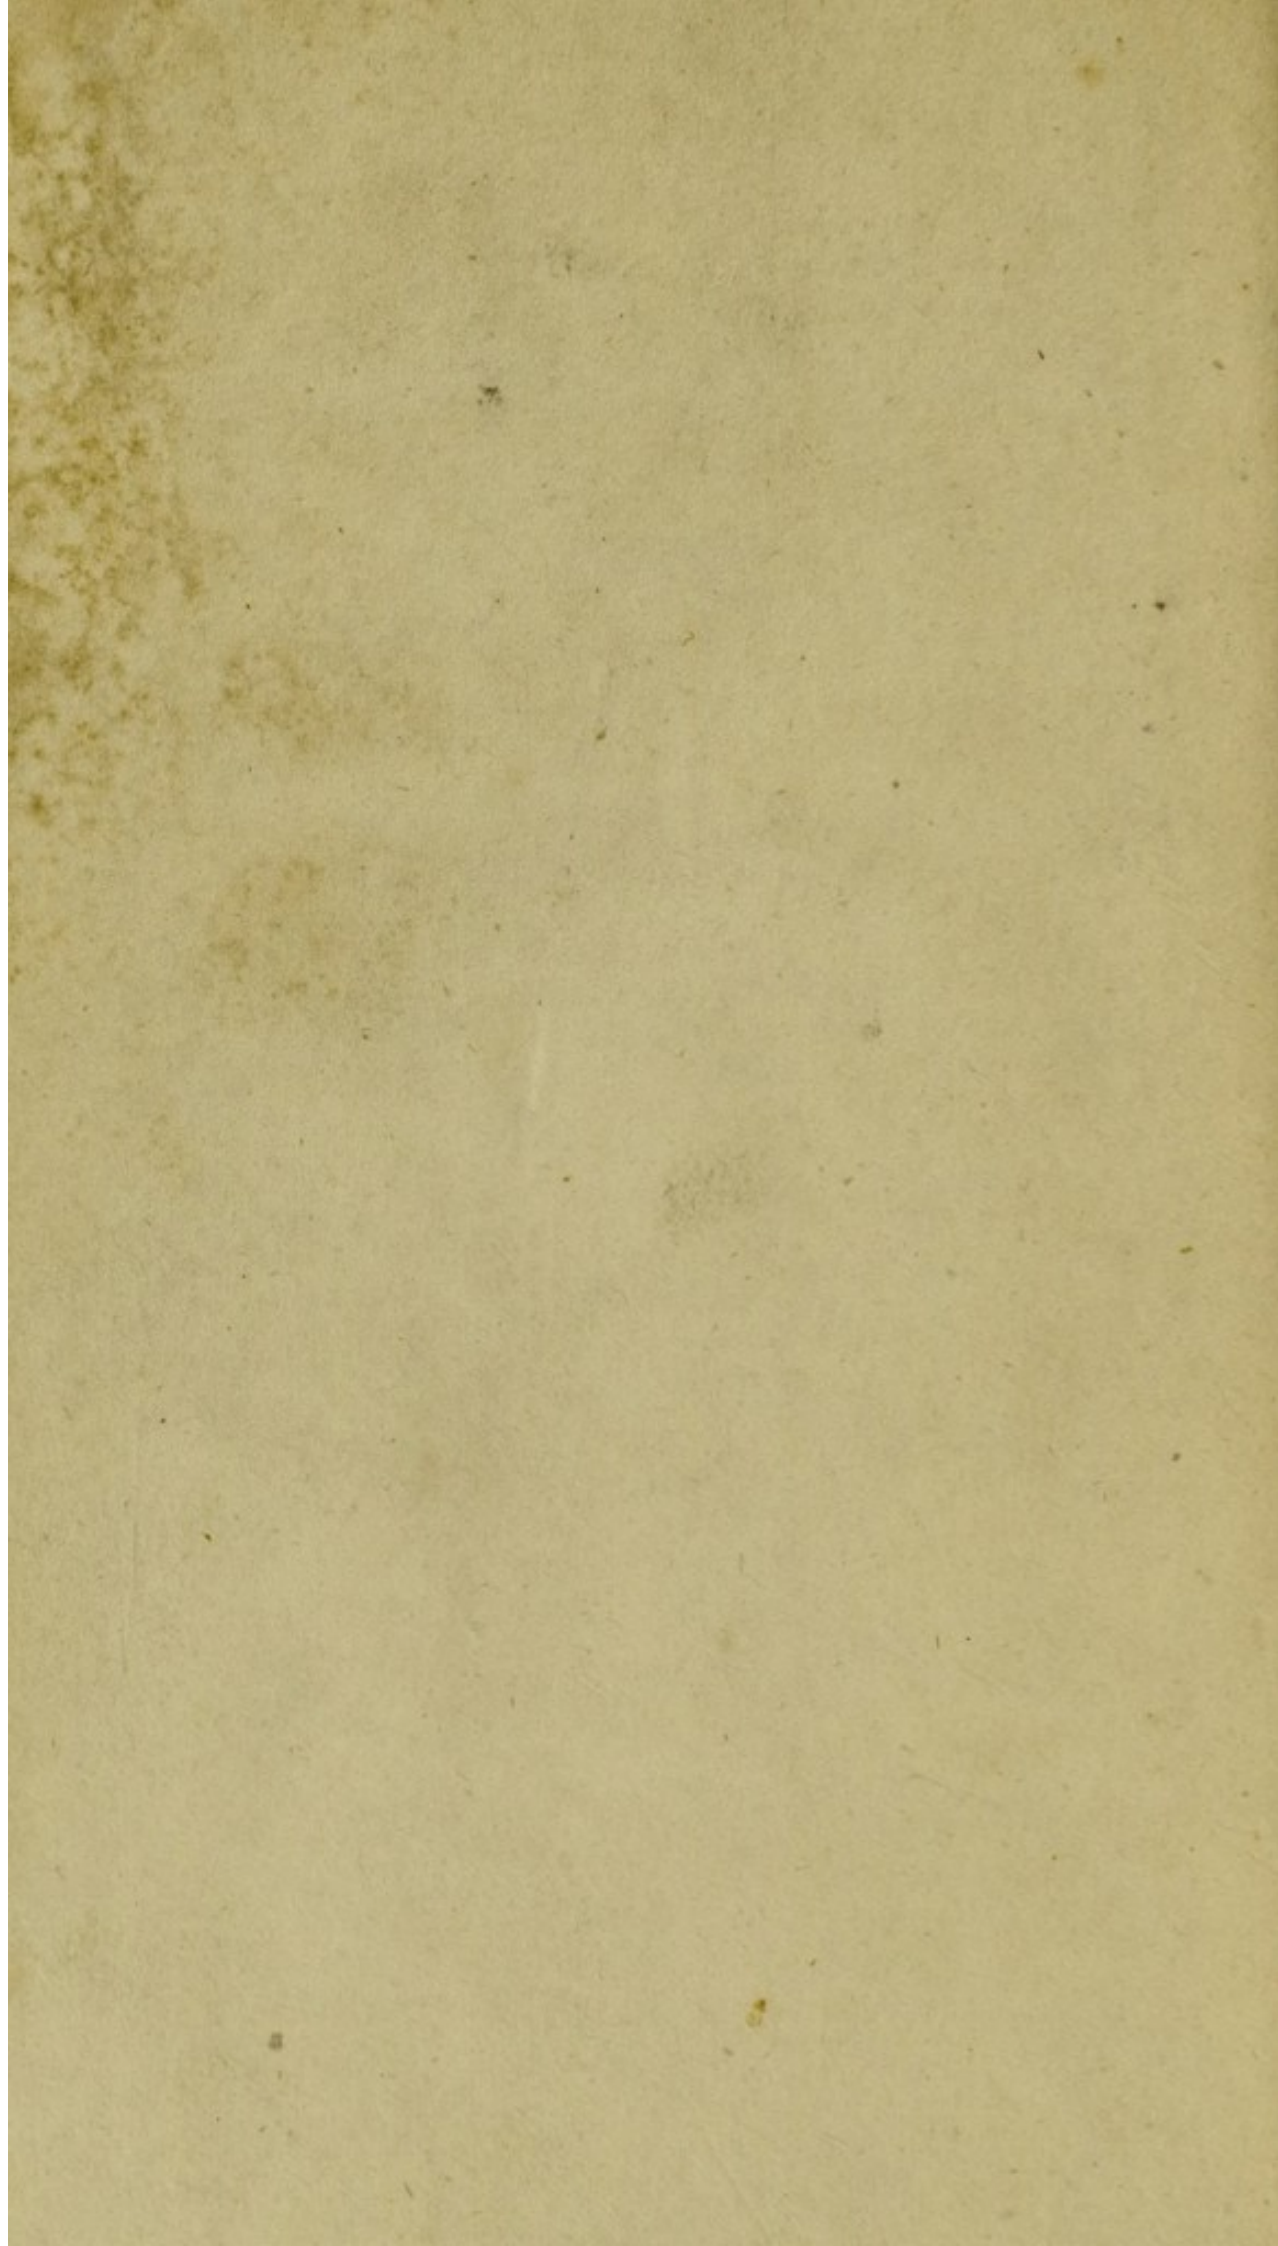

B2117



