

Specification of William Higginbottom Treacher : respirators.

Contributors

Treacher, William Higginbottom.

Publication/Creation

London : Great Seal Patent Office, 1859 (London : George E. Eyre and William Spottiswoode)

Persistent URL

<https://wellcomecollection.org/works/vxdd3d9d>

License and attribution

This work has been identified as being free of known restrictions under copyright law, including all related and neighbouring rights and is being made available under the Creative Commons, Public Domain Mark.

You can copy, modify, distribute and perform the work, even for commercial purposes, without asking permission.



Wellcome Collection
183 Euston Road
London NW1 2BE UK
T +44 (0)20 7611 8722
E library@wellcomecollection.org
<https://wellcomecollection.org>



A.D. 1858, 13th OCTOBER. N° 2281.

SPECIFICATION

OF

WILLIAM HIGGINBOTTOM TREACHER.

RESPIRATORS.


LONDON:

PRINTED BY GEORGE E. EYRE AND WILLIAM SPOTTISWOODE,
PRINTERS TO THE QUEEN'S MOST EXCELLENT MAJESTY :

PUBLISHED AT THE GREAT SEAL PATENT OFFICE,
25, SOUTHAMPTON BUILDINGS, HOLBORN.

Price 3d.

1859.

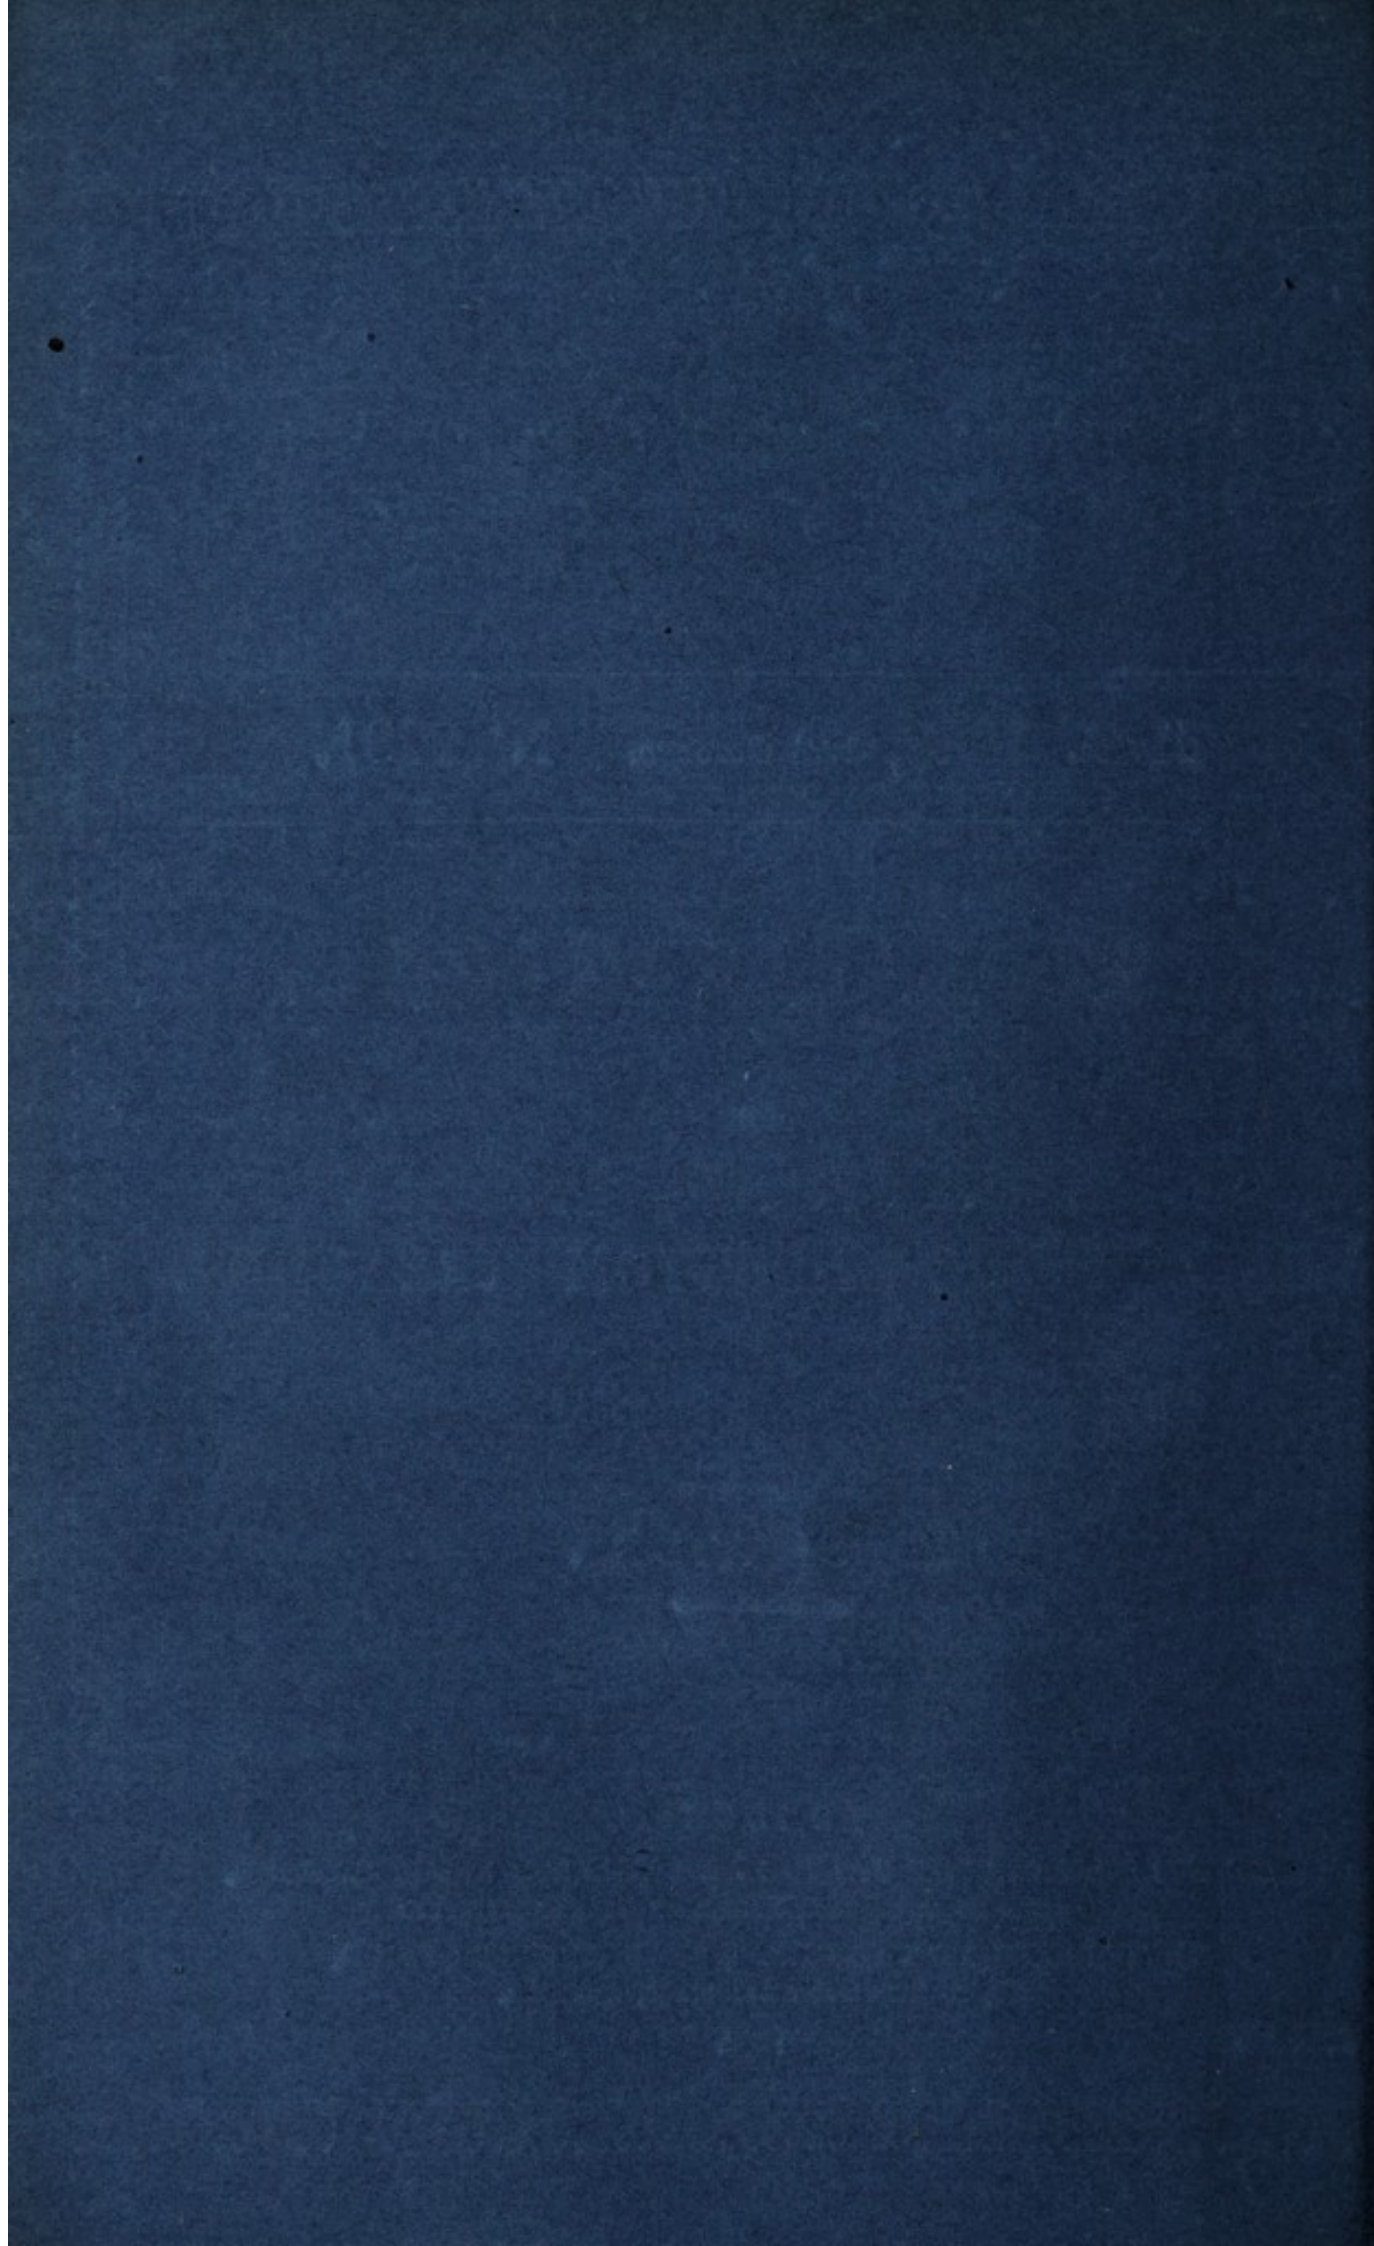



A.D. 1858, 13th OCTOBER. N^o 2281.

Respirators.

(This Invention received Provisional Protection only.)

PROVISIONAL SPECIFICATION left by William Higginbottom Treacher at the Office of the Commissioners of Patents, with his Petition, on the 13th October 1858.

I, WILLIAM HIGGINBOTTOM TREACHER, of Blackfriars Road, in the County
5 of Surrey, Surgical Mechanician, do hereby declare the nature of the said
Invention for "**IMPROVEMENTS IN RESPIRATORS**," to be as follows:—

My Invention consists, first, in forming respirators with separate chambers
for inhalation and exhalation in the manner hereafter described; and, second,
in fitting into the inhaling chamber powdered charcoal or other chemical
10 purifying agent.

I construct my respirator with an outer shield or plate, which may be
covered with velvet, cloth, silk, or other textile material; at a small distance
behind this outer shield I place a similar plate, and bring both plates together
at their ends; along the centre of and between the plates I fix a partition, which
15 shuts off all communication between the top and bottom of the plates. In
the back plate I cut two slots, one above and the other below the partition,
and over these slots I fix upon slight springs or blades, thin pieces of metal,
one to each slot. These pieces of metal carried on the blades form valves,
and I make one to open inwards and the other outwards; I cover the space
20 between the outer and inner plates with perforated metal both at top and at
bottom, and for convenience of wear I apply a perforated metal screen at the
back of the inner plate, and pad the screen to make it fit over the mouth.

Where desired I place powdered charcoal or sponge moistened with any

Treacher's Improvements in Respirators.

purifying agent in that chamber to which the valve opening inwards is fitted. In this respirator, without the slightest additional effort in breathing, air is inhaled through one chamber and exhaled through a separate chamber; consequently the air exhaled is not again drawn into the lungs, nor can it commingle with that drawn in.

5

LONDON:

Printed by GEORGE EDWARD EYRE and WILLIAM SPOTTISWOODE,
Printers to the Queen's most Excellent Majesty. 1859.