

Specification of Joseph Wood : truss.

Contributors

Wood, Joseph.

Publication/Creation

London : Great Seal Patent Office, 1860 (London : George E. Eyre and William Spottiswoode)

Persistent URL

<https://wellcomecollection.org/works/mmqq739yy>

License and attribution

This work has been identified as being free of known restrictions under copyright law, including all related and neighbouring rights and is being made available under the Creative Commons, Public Domain Mark.

You can copy, modify, distribute and perform the work, even for commercial purposes, without asking permission.



Wellcome Collection
183 Euston Road
London NW1 2BE UK
T +44 (0)20 7611 8722
E library@wellcomecollection.org
<https://wellcomecollection.org>



A.D. 1859, *30th July.* N^o 1765.

S P E C I F I C A T I O N

OF

JOSEPH WOOD.

TRUSS.

LONDON:

PRINTED BY GEORGE E. EYRE AND WILLIAM SPOTTISWOODE,


PRINTERS TO THE QUEEN'S MOST EXCELLENT MAJESTY:

PUBLISHED AT THE GREAT SEAL PATENT OFFICE,

25, SOUTHAMPTON BUILDINGS, HOLBORN.

Price 5d.

1860.

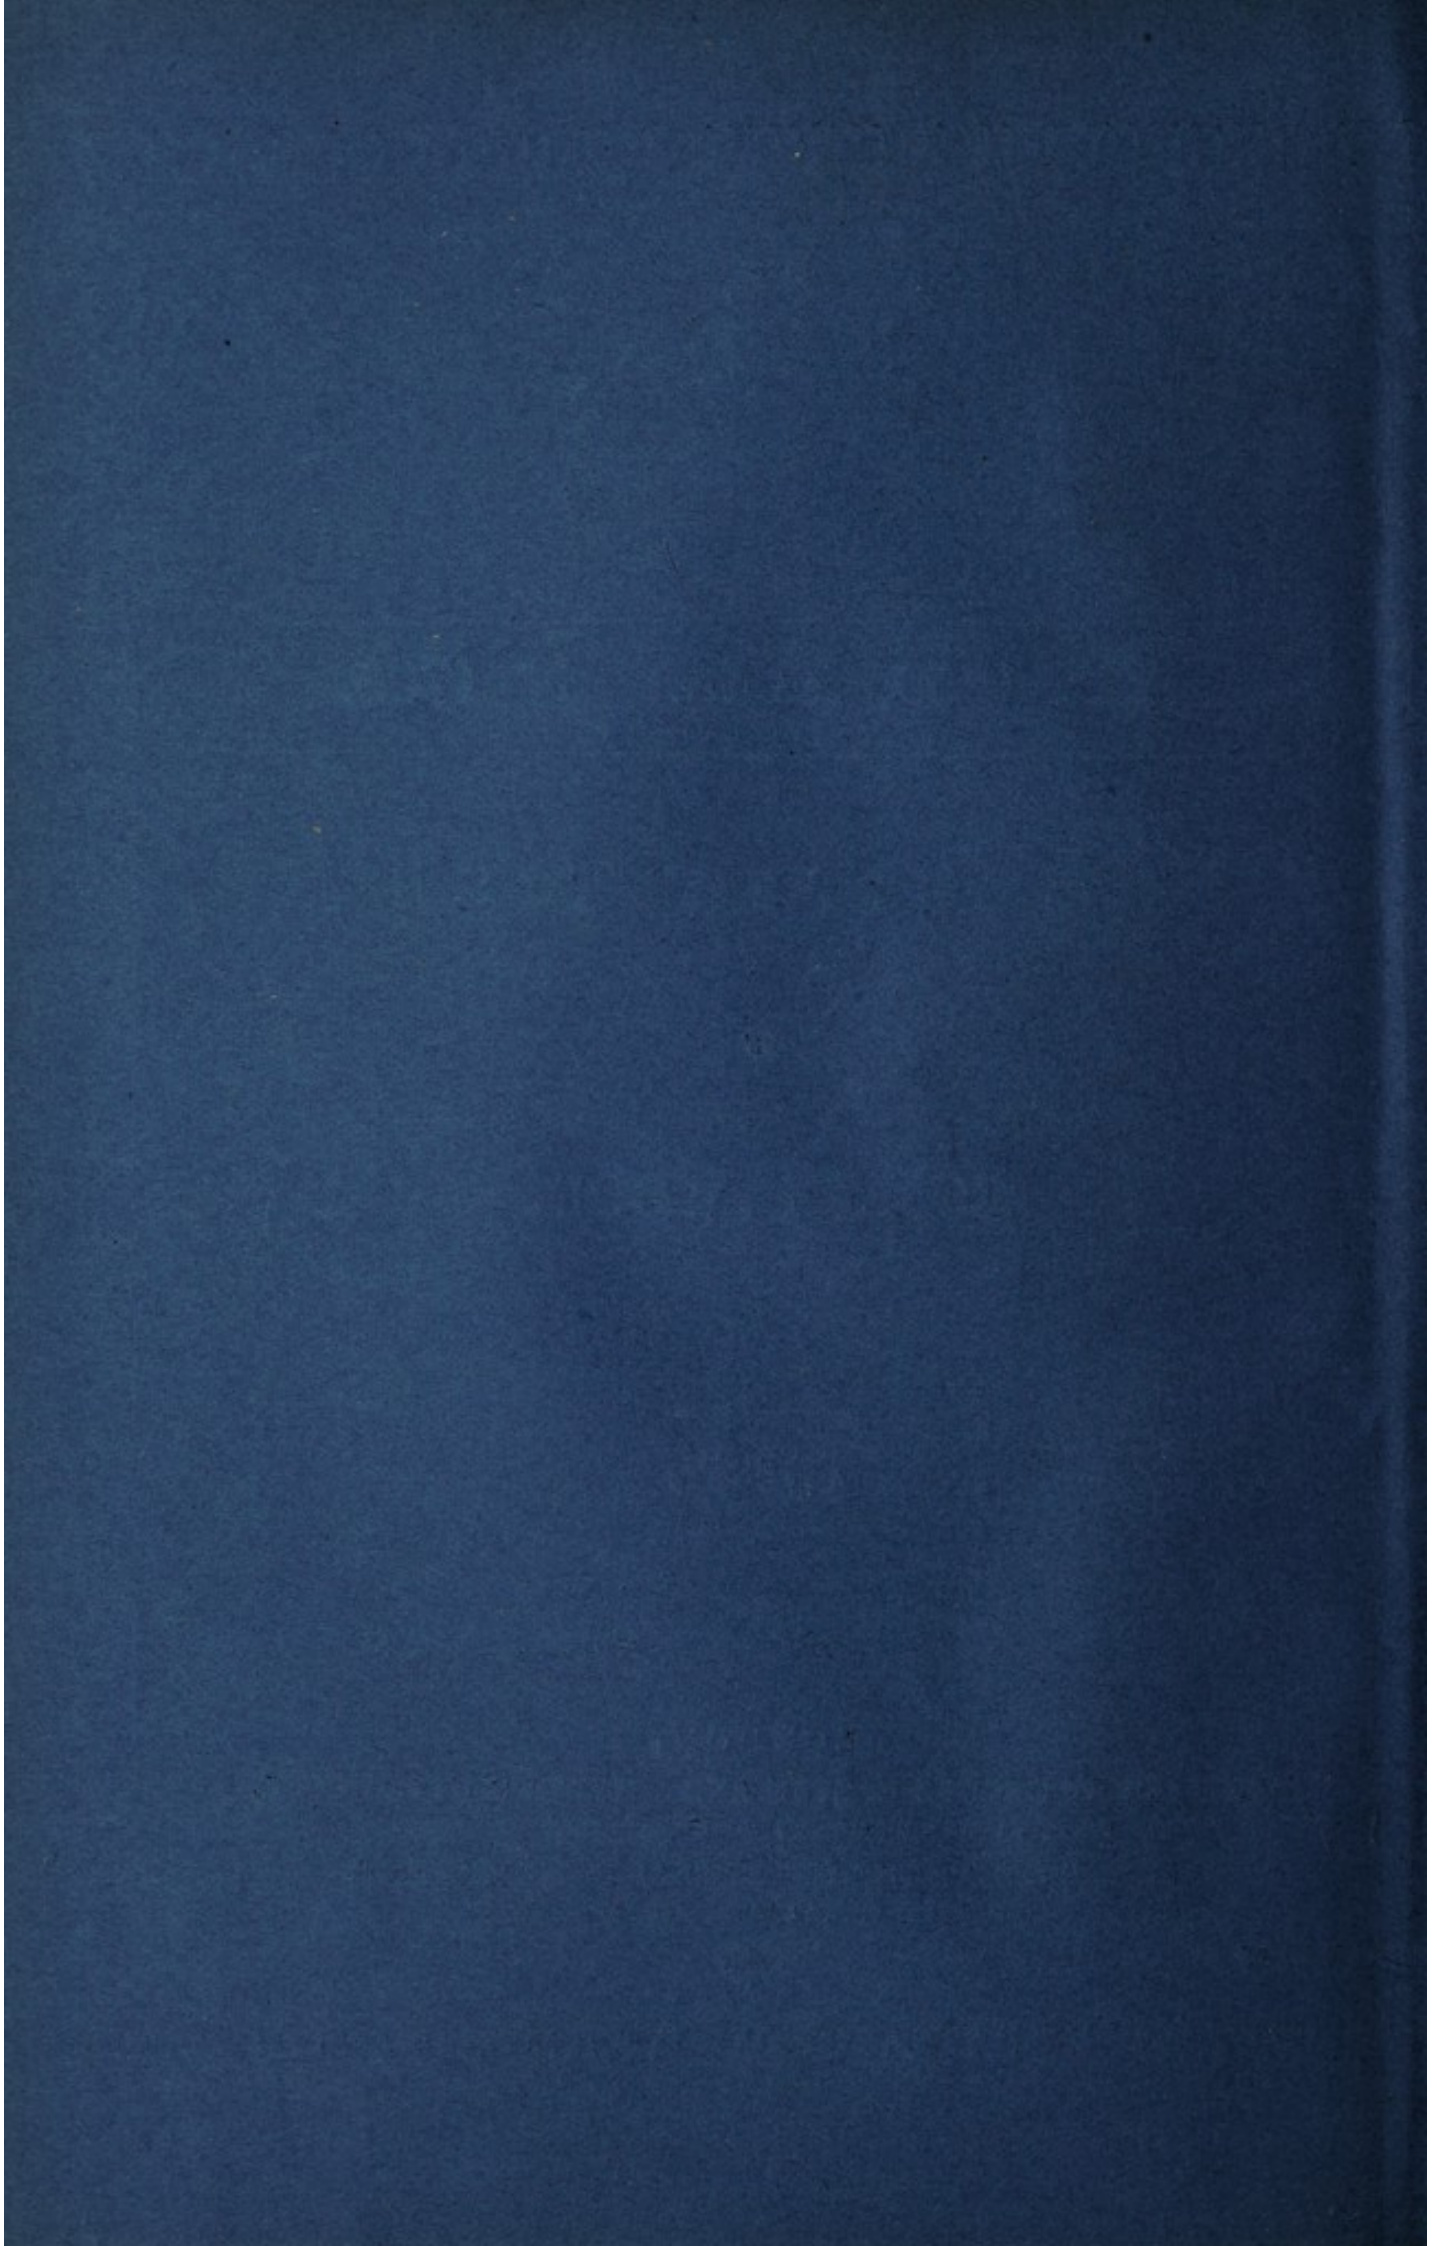



A.D. 1859, 30th JULY. N° 1765.

Truss.

LETTERS PATENT to Joseph Wood, of York City, Surgical Instrument Maker, for the Invention of "**AN IMPROVED TRUSS FOR HERNIA.**"

Sealed the 13th October 1859, and dated the 30th July 1859.

PROVISIONAL SPECIFICATION left by the said Joseph Wood at the Office of the Commissioners of Patents, with his Petition, on the 30th July 1859.

I, JOSEPH WOOD, of York City, Surgical Instrument Maker, do hereby
5 declare the nature of the said Invention for "**AN IMPROVED TRUSS FOR HERNIA,**" to be as follows:—

The object of this Invention is to keep up permanently a firm, and as far as possible unshifting pressure on both abdominal rings, whether there be a single or double hernia, in order, first, that in single cases, protection and support may
10 be given to the sound side, and so prevent the occurrence of a rupture there, which is always to be feared, and at the same time to effect a firmer pressure on the ruptured side than is usually done by the ordinary means; and, secondly, that in double cases, the pressure on each side, as far as is attainable, may be equalised, and always kept applied to the same place, to the comfort
15 and curative benefit of of the wearer. To effect this end I construct a double truss as it were upon a single back, that is to say, I attach a suitably formed pad or cushion to the inner face of each extremity of a plate or back made of metal or of any other suitable material, and of such shape and size as will allow of its being comfortably worn, and of its extending across the pubic

Wood's Improved Truss for Hernia.

region from one abdominal ring to the other inclusive. The construction and position of these pads or cushions, as well as the distance between them, are suitably regulated to meet the case of the wearer.

SPECIFICATION in pursuance of the conditions of the Letters Patent, filed by the said Joseph Wood in the Great Seal Patent Office on the 5 30th January 1860.

TO ALL TO WHOM THESE PRESENTS SHALL COME, I, JOSEPH WOOD, of York City, Surgical Instrument Maker, send greeting.

WHEREAS Her most Excellent Majesty Queen Victoria, by Her Letters Patent, bearing date the Thirtieth day of July, in the year of our Lord 10 One thousand eight hundred and fifty-nine, in the twenty-third year of Her reign, did, for Herself, Her heirs and successors, give and grant unto me, the said Joseph Wood, Her special licence that I, the said Joseph Wood, my executors, administrators, and assigns, or such others as I, the said Joseph Wood, my executors, administrators, and assigns, should at any 15 time agree with, and no others, from time to time and at all times thereafter during the term therein expressed, should and lawfully might make, use, exercise, and vend, within the United Kingdom of Great Britain and Ireland, the Channel Islands, and Isle of Man, an Invention for "**AN IMPROVED TRUSS FOR HERNIA**," upon the condition (amongst others) that I, the said 20 Joseph Wood, my executors or administrators, by an instrument in writing under my, or their, or one of their hands and seals, should particularly describe and ascertain the nature of the said Invention, and in what manner the same was to be performed, and cause the same to be filed in the Great Seal Patent Office within six calendar months next and immediately 25 after the date of the said Letters Patent.

NOW KNOW YE, that I, the said Joseph Wood, do hereby declare the nature of the said Invention, and in what manner the same is to be performed, to be particularly described and ascertained in and by the following statement thereof, that is to say:—

30

The object of this Invention is to make pressure on both abdominal rings, at the same time keeping up effectually all protrusion where rupture exists, and preventing the rupture taking place when that has not already occurred. This Invention consists in forming a plate of metal, or of any other suitable material, of such shape and size as will allow of its being comfortably worn 35 and extending across the pubic region, and having a suitable pad or cushion at

Wood's Improved Truss for Hernia.

each extremity. The pads or cushions are thus made to bear on the abdominal rings at the same time, and the whole is kept in position by a suitable belt and straps.

By modifications this Invention is made applicable to inguinal, scrotal, and
5 femoral hernia.

And in order that my said Invention may be most fully understood and readily carried into effect, I will proceed to describe the Drawing hereunto annexed.

DESCRIPTION OF THE DRAWING.

- 10 Figure 1 is a front view of a truss constructed according to my Invention. *a, a*, is a plate of metal covered with leather, and having a projection or cushion at each extremity; this plate is shown separately at Figure 2, and a plan thereof with the cushions is shown at Figure 3. *a¹, a¹*, are studs on the plate *a*, to receive the attachments to the belt *b, b*, which are buckled or
15 otherwise fastened at their ends. By these buckles the perforated straps *d, d*, attached to the ends of the waist belt *e* are held; *f, f*, are elastic bands, which are fastened at one end to the studs *a², a²*, on the plate *a*, and at their other ends to the studs *e¹, e¹*, on the waist belt *e*; these bands *f, f*, pass between the legs of the person wearing the truss. Hence it will be seen
20 that a truss is produced for hernia in such manner that the pads or cushions on the plate *a* press at the same time on the abdominal rings, requiring only a belt (of elastic or non-elastic material) and under straps to keep it in its place. The form and size of the plate *a* and the pads thereon will require to be somewhat varied according to the position and nature of the rupture.
25 What I claim is the combination herein described.

In witness whereof, I, the said Joseph Wood, have hereunto set my hand and seal, this Eighteenth day of January, in the year of our Lord One thousand eight hundred and sixty.

JOSEPH WOOD. (L.S.)

LONDON:

Printed by GEORGE EDWARD EYRE and WILLIAM SPOTTISWOODE,
Printers to the Queen's most Excellent Majesty. 1860.

FIG. 3.



FIG. 1.

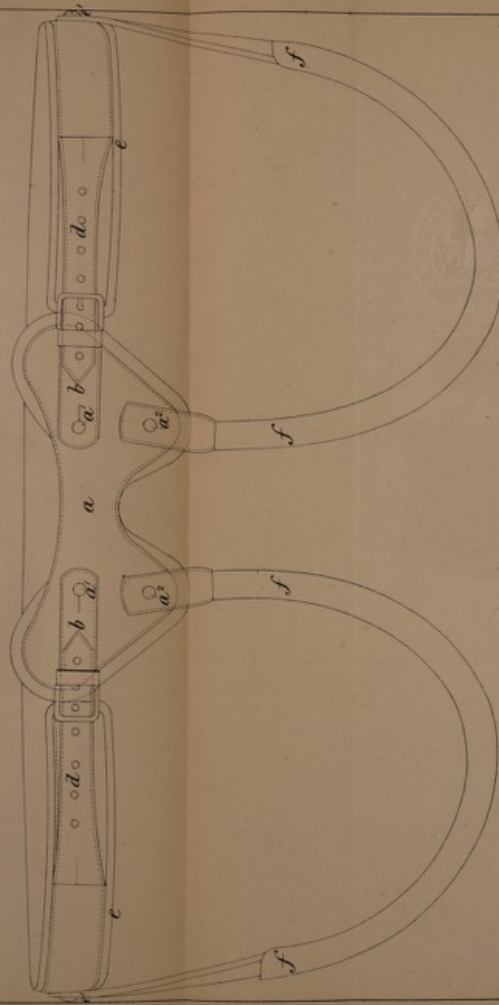


FIG. 2.



The filed drawing is colored.

Drawn on Stone by Malby & Son.

