#### **Specification of James Perrot Prince: syringe.**

#### **Contributors**

Prince, James Perrot.

#### **Publication/Creation**

London : Great Seal Patent Office, 1876 (London : George E. Eyre and William Spottiswoode)

#### **Persistent URL**

https://wellcomecollection.org/works/hccwyqgq

#### License and attribution

This work has been identified as being free of known restrictions under copyright law, including all related and neighbouring rights and is being made available under the Creative Commons, Public Domain Mark.

You can copy, modify, distribute and perform the work, even for commercial purposes, without asking permission.





A.D. 1875. 19th July.

Nº 2573.

# SPECIFICATION


OF

JAMES PERROT PRINCE.

SYRINGE.

### LONDON:

BY GEORGE E. EYRE AND WILLIAM SPOTTISWOODE, IBLISHED AT THE GREAT SEAL PATENT OFFICE, 25, SOUTHAMPTON BUILDINGS, HOLBORN.

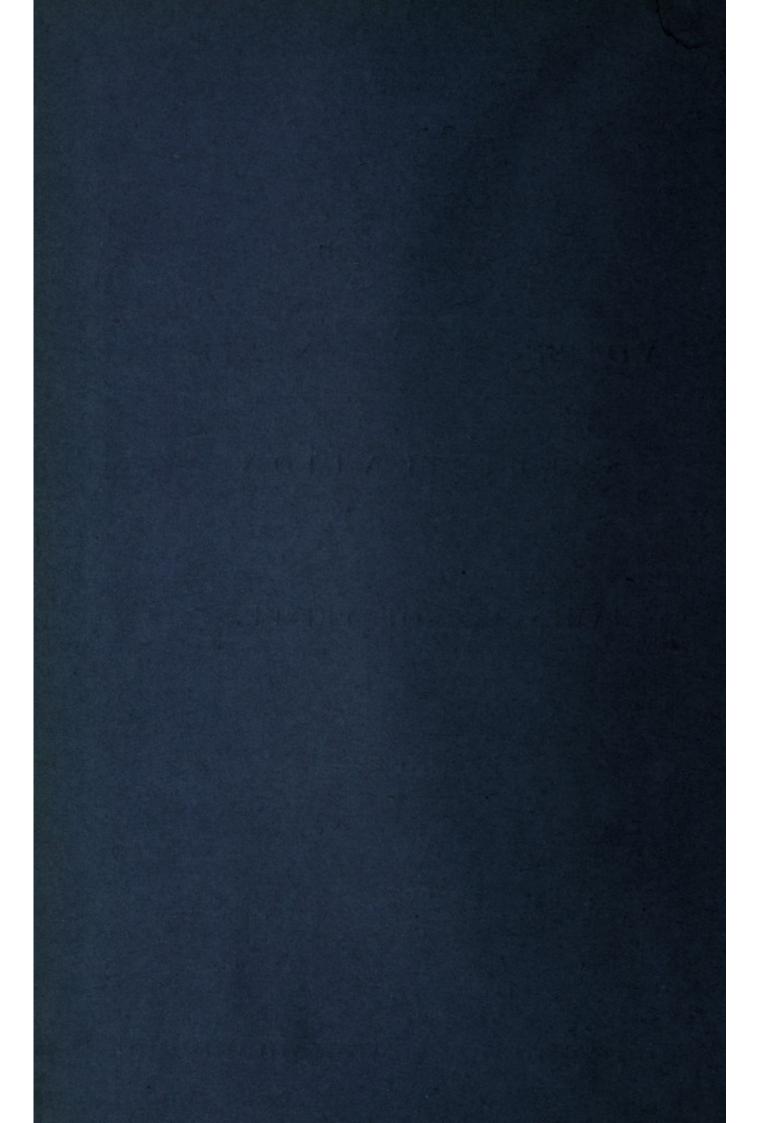



## A.D. 1875, 19th July. Nº 2573.

### Syringe.

(This Invention received Provisional Protection only.)

PROVISIONAL SPECIFICATION left by James Perrot Prince at the Office of the Commissioners of Patents, with his Petition, on the 19th July 1875.

I, James Perrot Prince, of Davies Street, in the County of Middle-5 sex, do hereby declare the nature of the said Invention for "An Improved Syringe for Surgical Purposes," to be as follows:—

My Invention relates to an improved syringe for surgical purposes, such as the cure of certain diseases and the cleansing of deep wounds, and the object of my improvement is to prevent the injection of the 10 liquid beyond the point where the action is required.

My improvement consists in so disposing the orifice or orifices of the neck or nozzle of the syringe, that the liquid contained shall be discharged or ejected backwards along the neck towards the point at which the syringe is introduced. To this end the tubular neck or nozzle of the syringe is made of sufficient length to reach beyond the part to be treated, and it terminates preferably in a slightly enlarged head or hollow bulb provided with one or more backwardly directed orifices, through which the liquid is discharged.

1.D. 1875, 194 Jan. N. 2573

