Specification of Charles Fredéric Vasserot : smoke consuming grate.

Contributors

Vasserot, Charles Fréderic.

Publication/Creation

London : Great Seal Patent Office, 1858 (London : George E. Eyre and William Spottiswoode)

Persistent URL

https://wellcomecollection.org/works/nv5mzbdt

License and attribution

This work has been identified as being free of known restrictions under copyright law, including all related and neighbouring rights and is being made available under the Creative Commons, Public Domain Mark.

You can copy, modify, distribute and perform the work, even for commercial purposes, without asking permission.



Wellcome Collection 183 Euston Road London NW1 2BE UK T +44 (0)20 7611 8722 E library@wellcomecollection.org https://wellcomecollection.org



A.D. $1857 \ldots N^{\circ} 2202$.

SPECIFICATION

OF


CHARLES FRÉDERIC VASSEROT.

SMOKE-CONSUMING GRATE.

LONDON:

PRINTED BY GEORGE E. EYRE AND WILLIAM SPOTTISWOODE, PRINTERS TO THE QUEEN'S MOST EXCELLENT MAJESTY: PUBLISHED AT THE GREAT SEAL PATENT OFFICE, 25, SOUTHAMPTON BUILDINGS, HOLBORN.

1858.

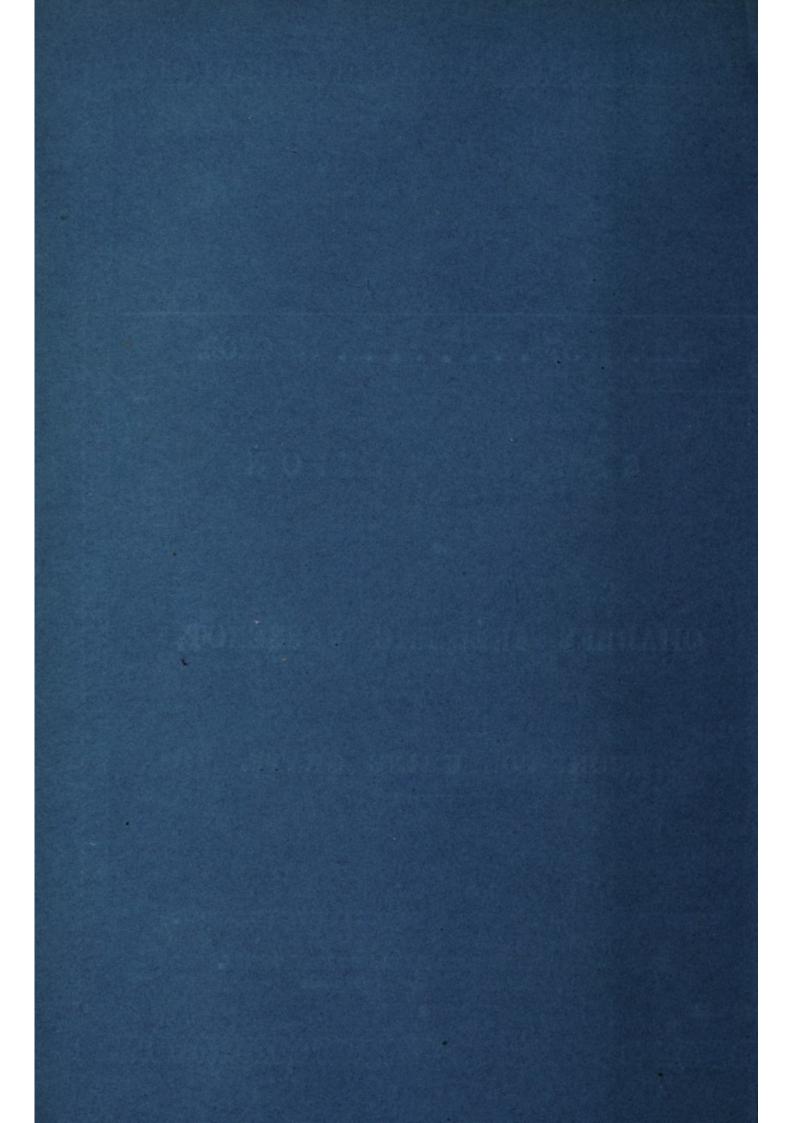



A.D. 1857 Nº 2202.

Smoke-consuming Grate.

- **PROVISIONAL SPECIFICATION** left by Charles Fredéric Vasserot at the Office of the Commissioners of Patents, with his Petition, on the 19th August 1857.—A communication from Messieurs Dalmatius de Luzy and Hector Grand de Chateauneuf, of Paris, France.
- I, CHARLES FRÉDERIC VASSEROT, of 45, Essex Street, Strand, London, Patent 5 Agent, do hereby declare the nature of the said Invention for "A SMOKE-CONSUMING GRATE," a communication from Messieurs Dalmatius de Luzy and Hector Grand de Chateauneuf, of Paris, France, to be as follows, and consist of two large tubes, in the side of which a set of pipes are adjusted 10 and form the grate. Those two tubes are connected with the boiler tubes and the boiler at the height of the lowest level of its water. The grate and the boiler tubes are inclined so as to allow the flames to pass in the direction of the gallery formed underneath the boiler. The grate is fixed above the said gallery so that the draft be made downwards upon it. The whole is 15 fixed on a frame made of bricks, which forms the fire-place and the ash-pit. Openings are made on the four sides of the grate for the admission of the atmospheric air. The grate is closed by means of a door placed above it, which is opened for the introduction of the fuel by means of a chain and counterpoise. With this arrangement the introduction of a great volume of air into the 20 fire-place becomes advantageous. The combustion of the coal, which hitherto took place at the upper part, descends now; the air arrives on the coal where it begins to burn, and the gases are ignited at the instant they are formed.

LONDON:

Printed by GEORGE EDWARD EYRE and WILLIAM SPOTTISWOODE, Printers to the Queen's most Excellent Majesty. 1858.

⁽This Invention received Provisional Protection, but notice to proceed with the application for Letters Patent was not given within the time prescribed by the Act.)

